18' X 43'7" LAZY ELL RIGHT 6"R


738


PERIMETER

DESCRIPTION

REV.

26700

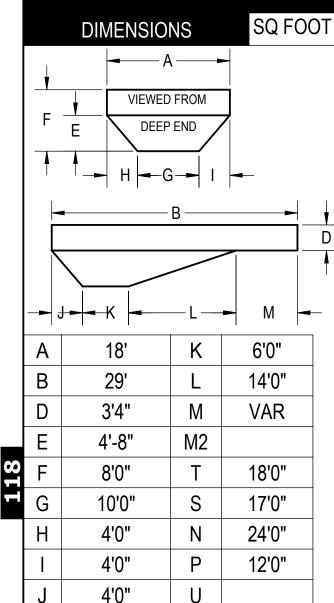

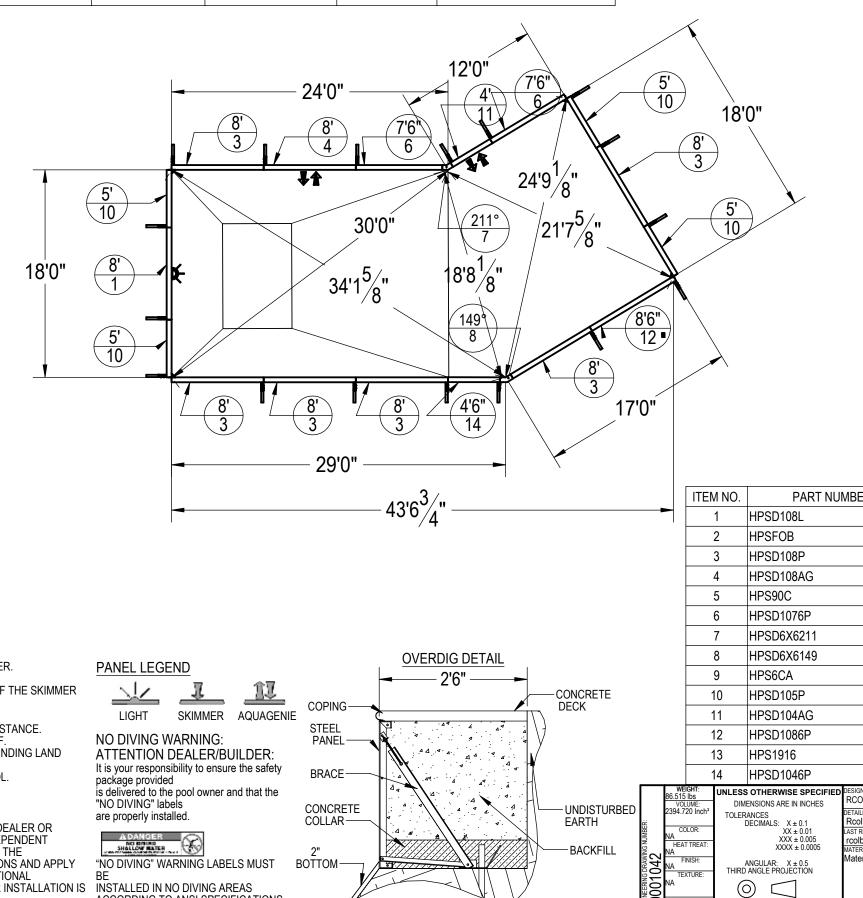

GALLONS

118'

NOTES:

- THESE ARE FINISHED DIMENSIONS READY FOR THE LINER.
- 2. 3. DIMENSIONS ARE FROM INSIDE POOL PANELS.
- THE IDEAL WATER LEVER SHOULD BE TO THE MIDDLE OF THE SKIMMER OPENING(S)
- **EXCAVATION NÓTES**
- ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE. SOIL TO HAVE MINIMUM BEARING CAPACITY OF 2000 PSF.
- 5.
- LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND 6. FI EVATION.
- SEE "OVER DIG DETAIL" FOR EXCAVATION AROUND POOL. 7.
- FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL. 8.
- BACK FILL WITH NON-EXPANSIVE MATERIAL. 9

IMPORTANT NOTES:

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.

ACCORDING TO ANSI SPECIFICATIONS

DAT	ED	604	78

BER		QTY.		
		1		
		17		
		6		
		1		
		4		
		2		
		1		
		1		
		4		
	5' PLAIN PANEL			
		4' AG PANEL	1	
		8'6" PLAIN PANEL	1	
		5		
		1		
	CREATION DATE: 10/17/2012	SAMSON STEEL		
TAILED BY: DETAILED DATE: colboch 8/30/2012		BY HYDRA POOLS		
T REVISED BY: LAST REVISED DATE: olboch 11/14/2012		18' X 43'7" LAZY ELL RIGHT 6"R		
rerial <not specified=""></not>				
		PART NUMBER: 60478	SCALE: 1:96 SHEET: 1 OF 1	

REVISION HISTORY							
	DATE	STATUS	ECO	BY			