
## 16' X 41' X 24' TRUE ELL RIGHT 6"R

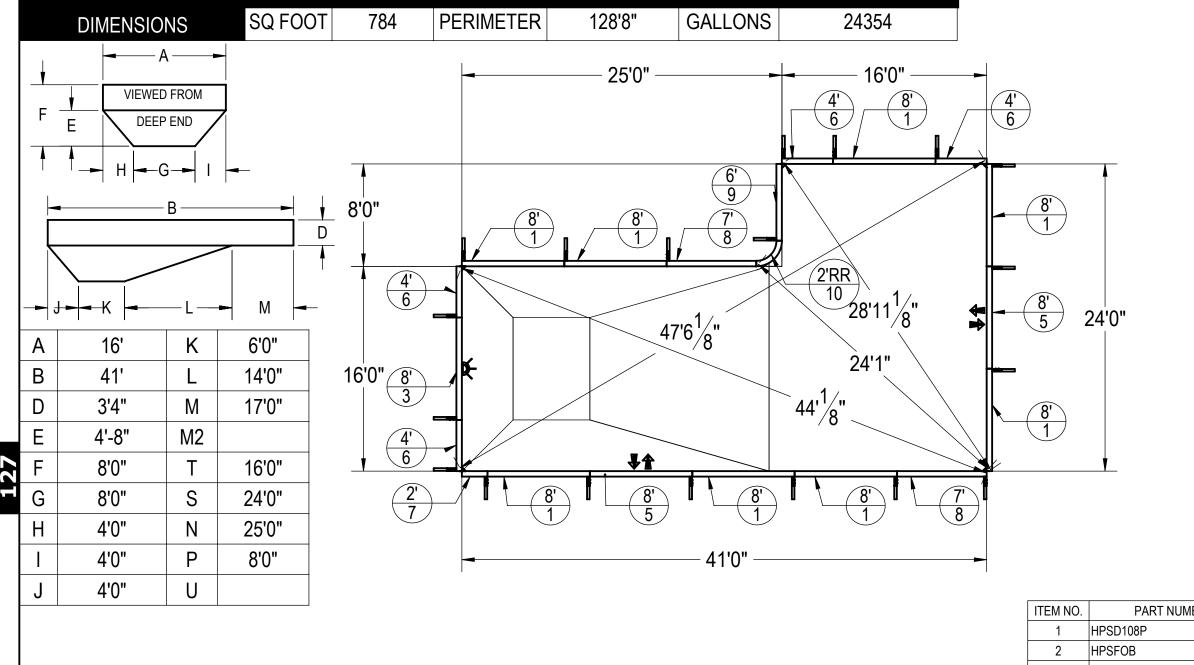

## NOTES:

- THESE ARE FINISHED DIMENSIONS READY FOR THE LINER.
- 2. 3. DIMENSIONS ARE FROM INSIDE POOL PANELS.
- THE IDEAL WATER LEVER SHOULD BE TO THE MIDDLE OF THE SKIMMER OPENING(S)

**EXCAVATION NÓTES** 

- ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE. SOIL TO HAVE MINIMUM BEARING CAPACITY OF 2000 PSF. 5.
- LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND 6. FI EVATION.
- SEE "OVER DIG DETAIL" FOR EXCAVATION AROUND POOL. 7.
- FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL. 8.
- BACK FILL WITH NON-EXPANSIVE MATERIAL. 9

**IMPORTANT NOTES:** 

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.





"NO DIVING" labels are properly installed

ADANGER	0
NO DRIBO	1.0.3
SHOLLOW MATER	VУ

"NO DIVING" WARNING LABELS MUST ΒE

INSTALLED IN NO DIVING AREAS ACCORDING TO ANSI SPECIFICATIONS

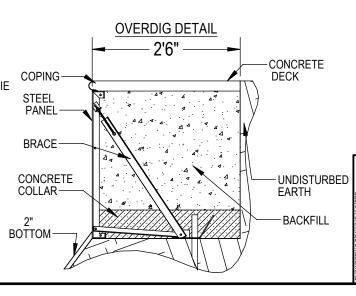



REV.

	REVIS	SION HISTOR	Y	
DESCRIPTIC			DATE STATUS ECO	BY
)"				
)				
PART NUMBER			DESCRIPTION	QTY.
D108P			8' PLAIN PANEL	8
-OB			STEEL BRACE	19
D108L			8' LIGHT PANEL	1
6CA			6" CORNER ASSEMBLY	5
D108AG		8' AG PANEL		2
D104P			4	
D102P			2' PLAIN PANEL	
D107P			7' PLAIN PANEL	
D106P		6' PLAIN PANEL		1
2RR			2'R REVERSE PANEL	1
RWISE SPECIFIED	DESIGNED BY: RCOLBOCH	CREATION DATE:		
ARE IN INCHES	DETAILED BY:	10/17/2012 DETAILED DATE:	SAMSON STEEL BY HYDRA POOLS	
S: X ± 0.1 XX ± 0.01	Rcolboch LAST REVISED BY:	8/30/2012 LAST REVISED DATE:		
XXX ± 0.005 XXXX ± 0.0005	rcolboch MATERIAL:	11/16/2012	IU A 41 A 24 IRUE ELL I	
R: X ± 0.5 PROJECTION	X ± 0.5 Material <not specified=""></not>			
$\neg$				SCALE: SIZE: 1:96
7			60508	SHEET: 1 OF 1