18'6" X 39' X 22' GRECIAN TRUE ELL LEFT

PERIMETER

137'5"


GALLONS


912

DESCRIPTION

REV.

26742

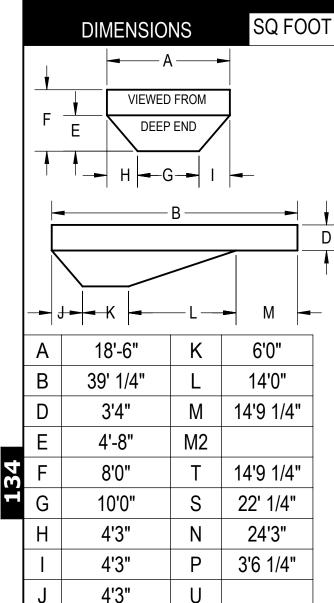

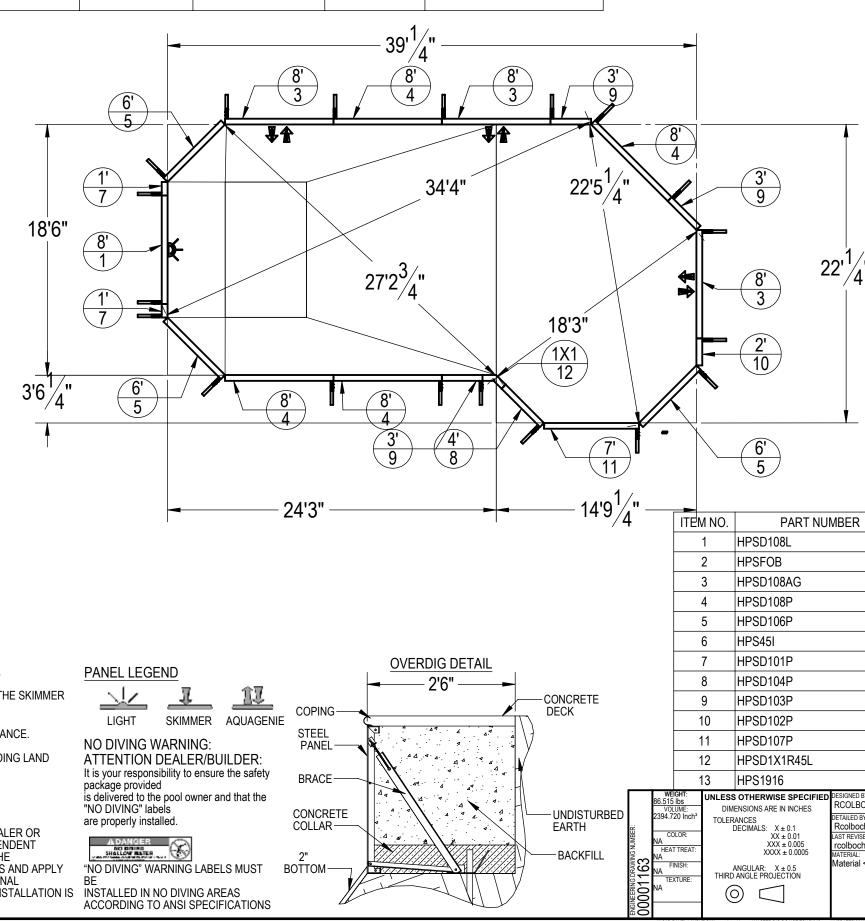

NOTES:

- THESE ARE FINISHED DIMENSIONS READY FOR THE LINER.
- 2. 3. DIMENSIONS ARE FROM INSIDE POOL PANELS.
- THE IDEAL WATER LEVER SHOULD BE TO THE MIDDLE OF THE SKIMMER OPENING(S)

EXCAVATION NÓTES

- ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE. SOIL TO HAVE MINIMUM BEARING CAPACITY OF 2000 PSF. 5.
- LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND 6. FI EVATION.
- SEE "OVER DIG DETAIL" FOR EXCAVATION AROUND POOL.
- FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL. 8.
- BACK FILL WITH NON-EXPANSIVE MATERIAL. 9

IMPORTANT NOTES:

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.

REVISION HISTOR		
N	DATE STATUS ECO	BY
2'1/"		
IBER	DESCRIPTION	QTY.
	8' LIGHT PANEL	
	STEEL BRACE	
	8' AG PANEL	
	8' PLAIN PANEL	
	6' PLAIN PANEL	
	45° INSERT 9	
	1' PLAIN PANEL 2 4' PLAIN PANEL 1	
	4' PLAIN PANEL	
	3' PLAIN PANEL	
		1
7' PLAIN PANEL		1
	1'X 1' R 45° ELL	1
ESIGNED BY: CREATION DATE:	BOLT PACK 50 PCS	6
RCOLBOCH 10/17/2012 ETAILED BY: DETAILED DATE:	SAMSON STEEL BY HYDRA POOLS	
Rcolboch 8/30/2012 AST REVISED BY: LAST REVISED DATE rcolboch 11/16/2012 IATERIAL: Aaterial <not specified=""></not>		
JPDATED/60560	PART NUMBER: 60560	SCALE: 1:96 SHEET: 1 OF 1