18' X 35'9" ROMAN END DEEP 2'R

644


PERIMETER


100'1"

GALLONS

DESCRIPTION

REV.

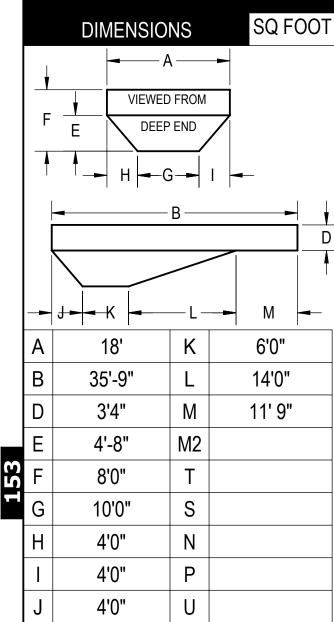

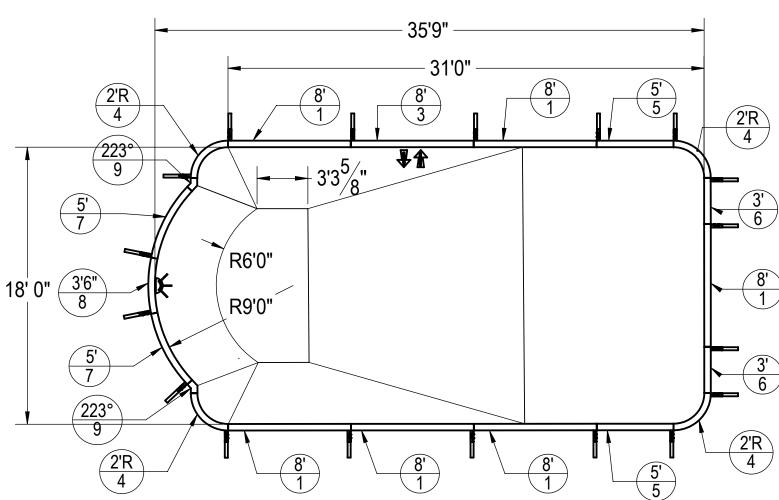

23075

NOTES:

- THESE ARE FINISHED DIMENSIONS READY FOR THE LINER.
- 2. 3. DIMENSIONS ARE FROM INSIDE POOL PANELS.
- THE IDEAL WATER LEVER SHOULD BE TO THE MIDDLE OF THE SKIMMER OPENING(S)


EXCAVATION NÓTES

- ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE. SOIL TO HAVE MINIMUM BEARING CAPACITY OF 2000 PSF. 5.
- LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND 6. **FI EVATION**
- SEE "OVER DIG DETAIL" FOR EXCAVATION AROUND POOL. 7.
- FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL. 8.
- BACK FILL WITH NON-EXPANSIVE MATERIAL. 9

IMPORTANT NOTES:


THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.






INSTALLED IN NO DIVING AREAS ACCORDING TO ANSI SPECIFICATIONS

ΒE

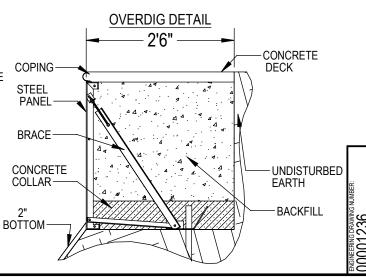

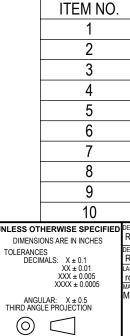

86.515 lbs VOLUME: 2394.720 Inch

COLOR:

HEAT TREAT

FINISH

TEXTURE:

)		
PART NUMBER	DESCRIPTION	QTY.
HPSD108P	8' PLAIN PANEL	6
HPSFOB	STEEL BRACE	18
HPSD108AG	8' AG PANEL	1
HPSD2R	2'R PANEL	4
HPSD105P	5' PLAIN PANEL	2
HPSD103P	3' PLAIN PANEL	2
HPSD9R5	9'R 5' PLAIN PANEL	2
HPSD9R36L	9'R 3'6 LIGHT PANEL	1
HPSD6X6223	6"X6" 223° PANEL	2
HPS1916	BOLT PACK 50 PCS	4
ESIGNED BY: CREATION DATE: RCOLBOCH 10/17/2012	SAMSON STEEL	
ETAILED BY: DETAILED DATE: Rcolboch 8/30/2012	BY HYDRA POOLS	
AST REVISED BY: LAST REVISED DA rcolboch 11/16/2012 IATERIAL:	18' X 35'9" ROMAN END	DEEP 2'R
Aterial <not specified=""></not>		
	PART NUMBER: 60805	SCALE: 1:96 SHEET: 1 OF 1
PDATED/60805		