

DIMENSIONS

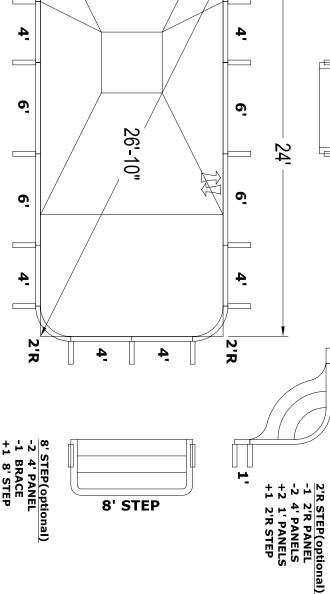

겅

2<sup>'</sup>R

2'R

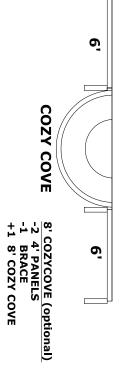

## **EXCAVATION NOTES**

- Dimensions are from inside pool panels.
   The ideal water level should be to the middle of the skimmer opening(s).

GENERAL NOTES


hese are finished dimensions ready for the liner.

- 1. Rough excavation should be 2" deeper in each instance.
  2. Soil to have minimum bearing capacity of 2000 P.S.F.
  3. Locale top of pool at least 6" above surrounding land elevation.
  4. See "Overdig Detail" for excavation around pool.
  5. Fill voids under base of panels and tamp well.

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. ADDITIONAL NOTES


agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an Proper installation is the responsibility of the dealer/builder/contractor.


> P T COPING LAYOUT BILL OF MATERIALS 9 m U ᇚ |HP352M| 2'R PANEL HP304L | 4' PANEL (LIGHT HP304 4' PANEL HP399 | BRACE HP302 | 2' PANEL HP306A | 6' PANEL (A/G) HP306 | 6' PANEL PART 3'4" 28 4 4 ගු 24 샹 DESCRIPTION U Z S 3 œ œ PERIMETER **APSP TYPE** OVERDIG DETAIL \*NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO. USE NON-EXPANSIVE MATERIAL FOR BACKFILL CONCRETE BOND BEAM 6" TO 8" DEEP UNDISTURBED EARTH APPROX 4" DEEP BRACE 68'7" 0 3/8" REBAR WHERE NEEDED AROUND PERIMETER OF BOND BEAM **NO DIVING WARNING** SQ. FOOTAGE - 2'6" OVERDIG **GALLONS** COPING OR SAND BOTTOM PANEL BENCHMARK VINYL LINER 8300 288

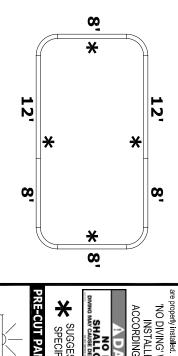

It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels

ATTENTION DEALER/BUILDER

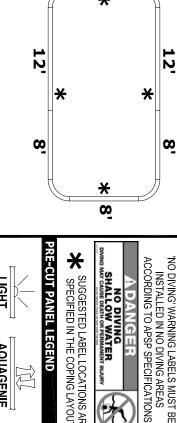





CORNERSTONE 12' X 24' RECTANGLE 2' RADIUS

**JAN 2007** 

30102