14' X 28' RECTANGLE 4' RADIUS - WEDGE

Б

28 4

PERIMETER **APSP TYPE**

77'2" 0

GALLONS

11753 392

SQ. FOOTAGE

DIMENSIONS

m U

3'4" 28

3


4 20

BILL OF MATERIALS

OVERDIG DETAIL

4 4 ගු

U Z

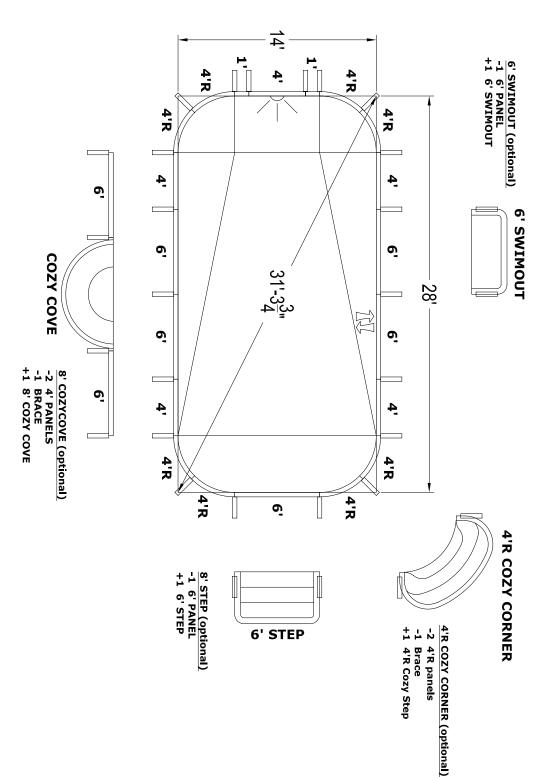

QT T COPING LAYOUT ο HP304L | 4' PANEL (LIGHT HP354 4'R PANEL HP304 4' PANEL HP301 | 1' PANEL HP306A | 6' PANEL (A/G) HP306 | 6' PANEL HP399 | BRACE PART * DESCRIPTION 12 12 * œ οō *NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO. USE NON-EXPANSIVE MATERIAL FOR BACKFILL CONCRETE BOND BEAM 6" TO 8" DEEP UNDISTURBED EARTH APPROX 4" DEEP مَ BRACE 3/8" REBAR WHERE NEEDED AROUND-PERIMETER OF BOND BEAM **NO DIVING WARNING** are properly installed. It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels ATTENTION DEALER/BUILDER PRE-CUT PANEL LEGEND SUGGESTED LABEL LOCATIONS ARE SPECIFIED IN THE COPING LAYOUT ACCORDING TO APSP SPECIFICATIONS NO DIVING' WARNING LABELS MUST BE NO DIVING SHALLOW WATER MAY CAUSE DEATH OR PERMANENT INJURY **INSTALLED IN NO DIVING AREAS** - 2'6" OVERDIG ADANGER COPING OR SAND BOTTOM PANEL BENCHMARK VINYL LINER

GENERAL NOTES

- hese are finished dimensions ready for the liner.

υνουπεκτ ID: HF5300, Comerstone Standard Panel Layout Drawing Rev Date: 12l6/2005 Rev Level: A

Dimensions are from inside pool panels.
 The ideal water level should be to the middle of the skimmer opening(s).

EXCAVATION NOTES

- Rough excavation should be 2" deeper in each instance.

- 2. Soil to have minimum bearing capacity of 2000 P.S.F.
 3. Locate top of pool at least 6" above surrounding land elevation.
 4. See 'Overdig Detail' for excavation around pool.
 5. Fill voids under base of panels and tamp well.

ADDITIONAL NOTES

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply The dealer or contractor who sells or installs your pool is an independant contractor and is not an THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

only to normal ground conditions. There may be additional precautions and/or methods of

Proper installation is the responsibility of the dealer/builder/contractor.

JAN 2007

HGHT

AQUAGENIE 191

CORNERSTONE | 14' X 28' RECTANGLE 4' RADIUS - WEDGE

30115

Copyright © 2007 by Hydra Pools.