
## |4' X 28' RECTANGLE 6" RADIUS



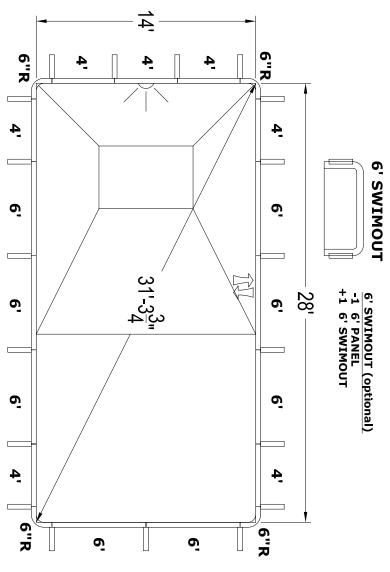

19

HP399 | BRACE


HP304L | 4' PANEL (LIGHT

HP306A | 6' PANEL (A/G) HP304 | 4' PANEL

HP306 | 6' PANEL PART

DESCRIPTION

BILL OF MATERIALS

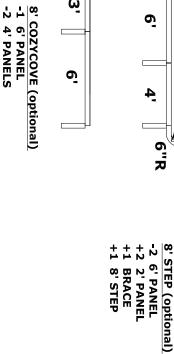

Q

ω

ω

ō

COZY COVE

+2 3' PANELS -2 4' PANELS

+1 8' COZY COVE

## 12' 12 12

## 3'4" 28 4 4 ගු ගු 28 Z S 3 햣 œ PERIMETER **APSP TYPE** 83'2" 0 SQ. FOOTAGE GALLONS 11054 392

Б

m U DIMENSIONS

				Π)						
UNDISTURBED   =	BACKFILL	USE NON-EXPANSIVE			POLYMER			APPROX 4" DEEP	OVERDIG DETAIL	
		<u></u>	\     					— 2'6" OVERDIG —-		
2' VERMICULITE OR SAND BOTTOM	•		VINYL LINER	PANEL	DO KARD	BENCHMARK	COPING	ALUMINUM		

\*NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO. 3/8" REBAR WHERE NEEDED AROUND-PERIMETER OF BOND BEAM **NO DIVING WARNING** 

CONCRETE BOND BEAM 6" TO 8" DEEP

COPING LAYOUT

It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels are properly installed. ATTENTION DEALER/BUILDER:

ACCORDING TO APSP SPECIFICATIONS 'NO DIVING' WARNING LABELS MUST BE **INSTALLED IN NO DIVING AREAS** 

12'

12'

×



SUGGESTED LABEL LOCATIONS ARE SPECIFIED IN THE COPING LAYOUT

## PRE-CUT PANEL LEGEND



HGHT

AQUAGENIE 131



CORNERSTONE 14' X 28' RECTANGLE 6" RADIUS

**JAN 2007** 

υσευπεντι ID: HF5300, Comerstone Standard Panel Layout Drawing Rev Date: 1216/2005 Rev Level: A

Dimensions are from inside pool panels.
 The ideal water level should be to the middle of the skimmer opening(s).

1. Rough excavation should be 2" deeper in each instance.
2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locale top of pool at least 0" above surrounding land elevation.
4. See 'Overdig Detail' for excavation around pool.
5. Fill voids under base of panels and tamp well.

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an

Proper installation is the responsibility of the dealer/builder/contractor.

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

ADDITIONAL NOTES

**EXCAVATION NOTES** 

Rough excavation should be 2" deeper in each instance.

hese are finished dimensions ready for the liner.

GENERAL NOTES

Copyright © 2007 by Hydra Pools

30110