16' X 32' RECTANGLE 2' RADIUS - BOWTIE

Б

32 <u>6</u>

7'6"

PERIMETER

92'7"

GALLONS

14621 512

APSP TYPE

0

SQ. FOOTAGE

ΩĪ


DIMENSIONS


U

3'4"

3

ගු

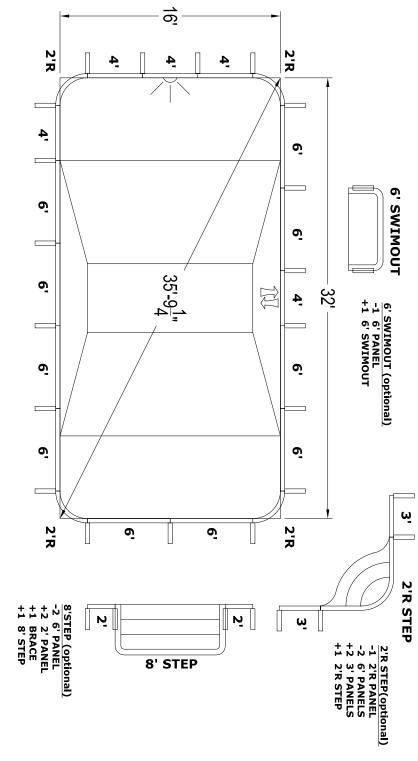

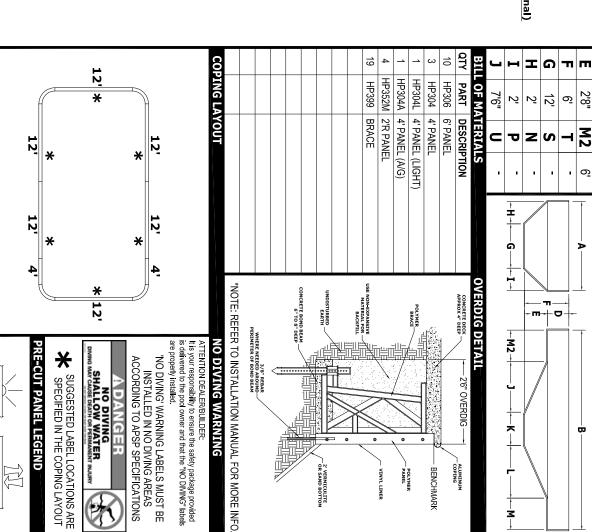

GENERAL NOTES

ō

4

4

Q

COZY COVE

8' COZYCOVE (optional)
-2 6' PANELS
+1 4' PANEL

+1 8' COZY COVE

- hese are finished dimensions ready for the liner.
- Dimensions are from inside pool panels.
 The ideal water level should be to the middle of the skimmer opening(s).
- 1. Rough excavation should be 2" deeper in each instance.
 2. Soil to have minimum bearing capacity of 2000 P.S.F.
 3. Locale top of pool at least 6" above surrounding land elevation.
 4. See "Overdig Detail" for excavation around pool.
 5. Fill voids under base of panels and tamp well.

EXCAVATION NOTES Rough excavation should be 2" deeper in each instance.

ADDITIONAL NOTES

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an Proper installation is the responsibility of the dealer/builder/contractor.





E

AQUAGENIE

CORNERSTONE 16' X 32' RECTANGLE 2' RADIUS - BOWTIE

JAN 2007

30125

Copyright © 2007 by Hydra Pools.