

16' X 41' X 24' TRUE-ELL LEFT 4' RADIUS (90°) 6' SWIMOUT 6' SWIMOUT (optional) -1 6' PANEL +1 6' SWIMOUT

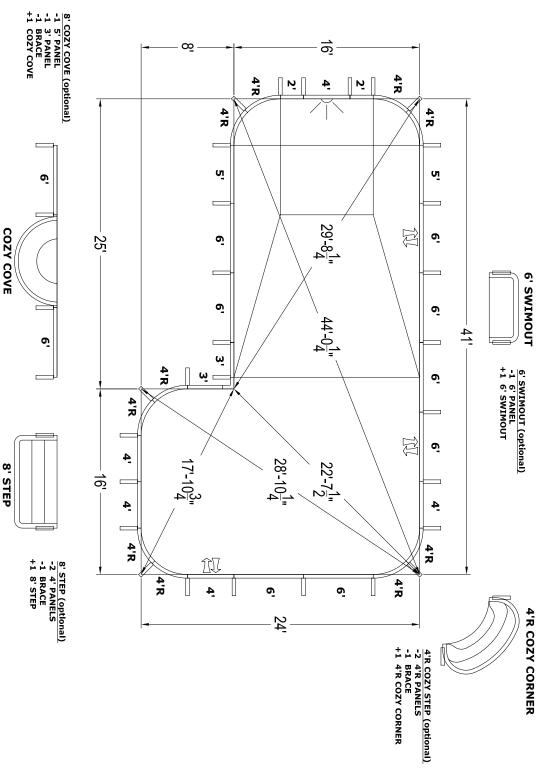

COPING LAYOUT œ 12' 12' 12' و 12 4 NO DIVING WARNING are properly installed. It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels ATTENTION DEALER/BUILDER: PRE-CUT PANEL LEGEND SPECIFIED IN THE COPING LAYOUT ACCORDING TO APSP SPECIFICATIONS 'NO DIVING' WARNING LABELS MUST BE NO DIVING SHALLOW WATER MAY CAUSE DEATH OR PERMANENT INJURY INSTALLED IN NO DIVING AREAS

									_																ı
			29	1	10	2	2	_	_	ω	2	2	6	QTY	BILL	J	н	I	G	П	ш	D	Φ	Þ	
			HP399	HP322	HP354	HP302	HP303	HP304A	HP304L	HP304	HP305	HP306A	HP306	PART		4"	4	4	∞_	∞	4'8"	3'4"	41'	16'	
			BRACE	REVERS	4'R PANEL	2' PANEL	3' PANEL	4' PANEL (A/G)	4' PANEL (LIGHT)	4' PANEL	5' PANEL	6' PANEL (A/G)	6' PANEL	DESCRIPTION	OF MATERIALS	U	v	z	S	-	™ 2	3	_	~	
				REVERSE 90° PANE	P	'	'	- (A/G)	- (LIGHT)	'		- (A/G)	•	PTION	S		ω <u></u>	25'	24'	16'		17'	14'	රු	
				EL													±	-/			1		PE	≥	
																	-G	_			 A		PERIMETER	APSP TYPE	
*NOTE			G G		5			USE							OVER		Ţ			<u>-</u>			TER	PE	
*NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO	PER		CONCRETE BOND BEAM 6" TO 8" DEEP		UNDISTURBED		MATERIAL FOR - BACKFILL	VON-EXPANSIVE			POLYMER	rás.		CONCRETE DECK APPROX 4" DEEP	OVERDIG DETAIL		<u>.</u>	-п	 1- - (5 -	_		121'5"	I	
TO INST	3/8" REBAR WHERE NEEDED AROUND- PERIMETER OF BOND BEAM		# F					縆					_	ノ 一	TAIL		-JK						7		
ALLATIC	/8" REBAR D AROUND OND BEAM	<	Ī] —			<u> </u>	4			— 2'6" O\			+	-					•	SQ.F	
N MANU						\geq	ř							2'6" OVERDIG-			 	\			В		GALLONS	SQ. FOOTAGE	
JAL FOR					- N	•			1	\	۰			1,			+		\mathbb{R}^{-1}				SNC	AGE	
MORE		7	/		2' VERMICULITE				VINYI I INFR	PANEL		BENCHMARK	OPING	ALUMINUM			3						23851	784	
NFO.					ğ mi			•				Ŗ											51	4	

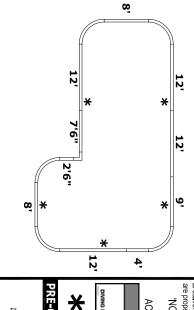

ADANGER



HGHT

AQUAGENIE R

CORNERSTONE Sweetwater, TN 37874

16' X 41' X 24' TRUE-ELL LEFT 4' RADIUS

30520

uucument ID: HF5300, Comerstone Standard Panel Layout Drawing Rev Date: 126/2005 Rev Level: A

Dimensions are from inside pool panels.
 The ideal water level should be to the middle of the skimmer opening(s).

1. Rough excavation should be 2" deeper in each instance.
2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See "Overtig Detail" for excavation around pool.
5. Fill voids under base of panels and tamp well.
6. Backfill with non-expansive material.

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an

Proper installation is the responsibility of the dealer/builder/contractor.

JAN 2007

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

ADDITIONAL NOTES

EXCAVATION NOTES

Rough excavation should be 2" deeper in each instance.

hese are finished dimensions ready for the liner.

GENERAL NOTES

Copyright © 2007 by Hydra Pools