16' X 41' X 24' TRUE-ELL LEFT 6" RADIUS (45°) 6' SWIMOUT 6' SWIMOUT (optional) -1 6' PANEL +1 6' SWIMOUT

œ ⊳

<u>6</u>

大

DIMENSIONS

U

3'4" 41

3

7

4 <u>ත</u>

PERIMETER 128'5"


APSP TYPE


H

SQ. FOOTAGE

GALLONS

24365 784

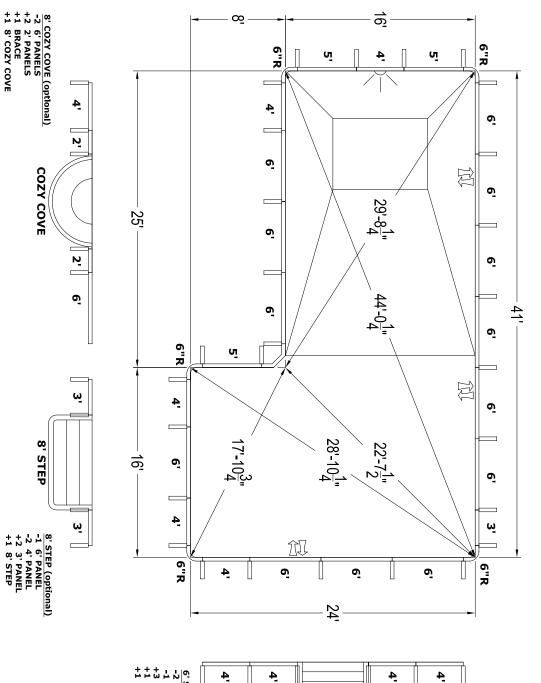

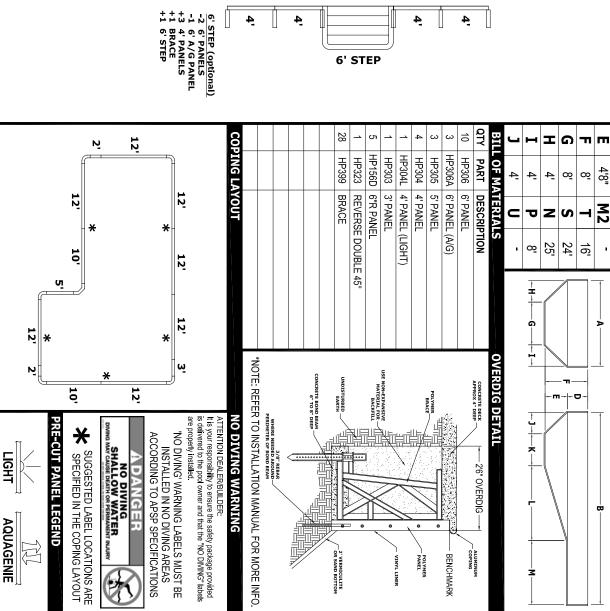

EXCAVATION NOTES

hese are finished dimensions ready for the liner.

GENERAL NOTES

uucument ID: HF5300, Comerstone Standard Panel Layout Drawing Rev Date: 1216/2005 Rev Level: A

- Dimensions are from inside pool panels.
 The ideal water level should be to the middle of the skimmer opening(s).
- Rough excavation should be 2" deeper in each instance.
- 1. Rough excavation should be 2" deeper in each instance.
 2. Soil to have minimum bearing capacity of 2000 P.S.F.
 3. Locate top of pool at least 6" above surrounding land elevation.
 4. See "Overdig Detail" for excavation around pool.
 5. Fill voids under base of panels and tamp well.
 6. Backfill with non-expansive material.

ADDITIONAL NOTES

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an Proper installation is the responsibility of the dealer/builder/contractor.

16' X 41' X 24' TRUE-ELL LEFT 6" RADIUS

JAN 2007

CORNERSTONE

30505