16'6" X 32'6" GRECIAN CONTOUR BOTTOM

Б

16'6" 32'6"

6¦3 4

Ш O

4<u>'</u>8 3<u>'</u>4

3

ထူ

PERIMETER **APSP TYPE**

88'1" Ħ


19378

536

SQ. FOOTAGE GALLONS

∞

DIMENSIONS

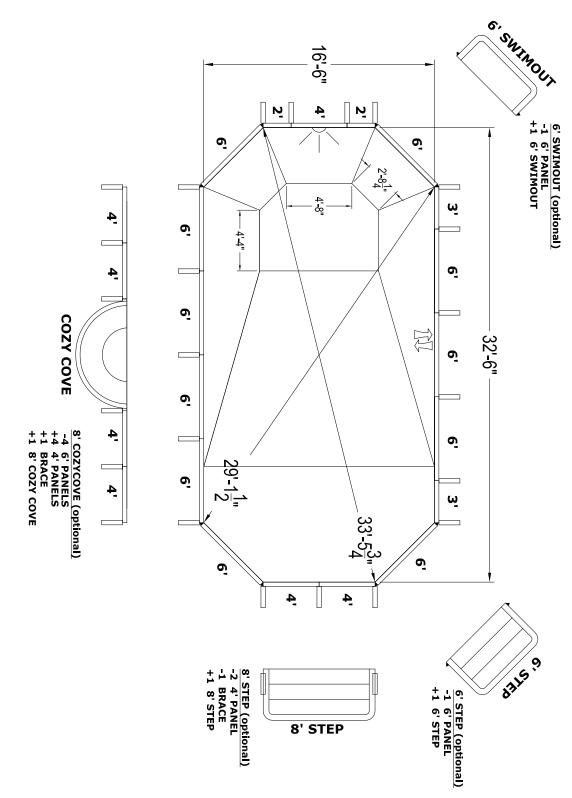

CO						ā	18	œ	2	2	1	2	1	10	QTY	BIL	J	н	I	മ	ļ.
ING LA						- 11 000	HP399	H01576	HP302	HP303	HP304L	HP304	HP306A	HP306	PART	L OF MA	4'	4	4	8'6"	,
YOUT						000	BRACE	45° WED	2' PANEI	3' PANEI	4' PANEI	4' PANEI	6' PANEI	6' PANEI	DESCRI	ITERIA	U	7	Z	S	
								ĞĒ			L (LIGHT)		L (A/G)		PTION	S		4'4"	4'8"		
																		± +	-/		
																		 -			
	*NO								c.							0VE		†			
	E REF			CONCRETE BO	5	UNDISTURB		MATERIA	SE NON-EXPA			POLYM			CONCRETE APPROX 4"	RDIG			п	- TI - 1 -	0
NO D	H TO N	WHERE N		ND BEAM 8" DEEP	-ií				NSW THE	¦⊟ī				/	DEED	DETAIL		→ J	-//		
WING	STALLA	3/8" REB. EEDED AROUI OF BOND BE!	<u> </u>							<u> </u>		m ''' 1			2'6			+	_		
WARN	TION MA	105	\	: آ <u>ل</u>			= >	= *	$\overline{\overline{}}$	$\overrightarrow{\prec}$	7				"OVERDI			ļ	\setminus		
ING	NUAL F		i i				•	<u>I</u>	•		•			L	<u></u>				,	\mathbb{I}	
	OR MOR				OR SAND	2' VERMIC				VINYL L	PANEL	PO 44	- BENC	207.200	ALUMINU			_ 			
	E INFO.				воттом	TITLE				INER	7	•	MARK		×			,			
	COPING LAYOUT NO DIVING WARNING	*NOTE: REFE					DPING LAYOUT		H01576 45° WEDGE HP399 BRACE	HP302 2' PANEL H01576 45° WEDGE HP399 BRACE	HP303 3' PANEL HP302 2' PANEL H01576 45° WEDGE HP399 BRACE	HP304L 4' PANEL (LIGHT) HP303 3' PANEL HP302 2' PANEL H01576 45° WEDGE HP399 BRACE DPING LAYOUT	HP304 4' PANEL HP304L 4' PANEL (LIGHT) HP303 3' PANEL HP302 2' PANEL HP302 2' PANEL HP309 BRACE HP399 BRACE	HP306A 6' PANEL (A/G) HP304 4' PANEL HP304L 4' PANEL (LIGHT) HP303 3' PANEL HP302 2' PANEL HP306 45' WEDGE HP399 BRACE	HP306 6' PANEL (A/G) HP304 4' PANEL (LIGHT) HP304 4' PANEL (LIGHT) HP302 2' PANEL HP307 45° WEDGE HP399 BRACE	PART DESCRIPTION HP306 6' PANEL (A/G) HP306 4' PANEL (L/GHT) HP301 4' PANEL (L/GHT) HP302 2' PANEL HP302 2' PANEL HP309 BRACE PING LAYOUT	PART DESCRIPTION	4' U	4' U - I-H-I-G-I-I PART DESCRIPTION HP306 6' PANEL (A/G) HP304 4' PANEL (LIGHT) HP303 3' PANEL (LIGHT) HP302 2' PANEL HP305 45° WEDGE HP399 BRACE	4'	8'6" S - 4' N 4'8" 4' P 4'4" 4' U - LOF MATERIALS PART DESCRIPTION HP306 6' PANEL (A/G) HP304 4' PANEL (LIGHT) HP303 3' PANEL HP302 2' PANEL HP305 45° WEDGE HP399 BRACE PING LAYOUT

ADDITIONAL NOTES

EXCAVATION NOTES

- Rough excavation should be 2" deeper in each instance.
- Dimensions are from inside pool panels.
 The ideal water level should be to the middle of the skimmer opening(s).

GENERAL NOTES

hese are finished dimensions ready for the liner.

υσευπεντι ID: HF5300, Comerstone Standard Panel Layout Drawing Rev Date: 1216/2005 Rev Level: A

- 1. Rough excavation should be 2" deeper in each instance.
 2. Soil to have minimum bearing capacity of 2000 P.S.F.
 3. Locate top of pool at least 6" above surrounding land elevation.
 4. See "Overdig Detail" for excavation around pool.
 5. Fill voids under base of panels and tamp well.
 6. Backfill with non-expansive material.

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an Proper installation is the responsibility of the dealer/builder/contractor.



3'4"

× 12

9'4"

*

3'4"

PRE-CUT PANEL LEGEND

HGHT

AQUAGENIE R * SUGGESTED LABEL LOCATIONS ARE SPECIFIED IN THE COPING LAYOUT



CORNERSTONE 16'6" X 32'6" GRECIAN CONTOUR BOTTOM

JAN 2007

30211