
16'6" X 32'6" GRECIAN - WEDGE

DIMENSIONS

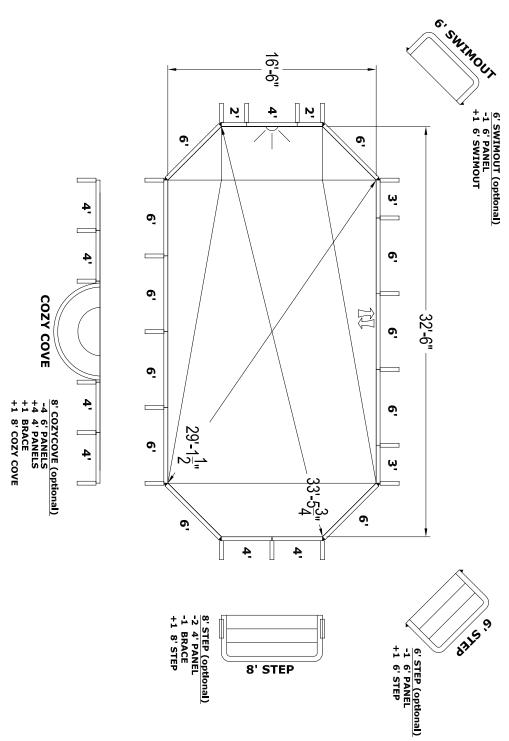


ADDITIONAL NOTES

1. Rough excavation should be 2" deeper in each instance.
2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See "Overdig Detail" for excavation around pool.
5. Fill voids under base of panels and tamp well.
6. Backfill with non-expansive material. Rough excavation should be 2" deeper in each instance.

EXCAVATION NOTES

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. Proper installation is the responsibility of the dealer/builder/contractor. **JAN 2007**

NO DIVING WARNING	NO I				TUOY	COPING LAYOUT	ဝူ
*NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO.	E: REFER TO	*NOT					
3/8" REBAR WHERE NEEDED AROUND PERINETER OF BOND BEAM	WHER						
	CONCRETE BOND BEAM 6" TO 8" DEEP						
2' VERMICULITE	UNDISTURBED						
	¥III≐				BRACE	HP399	1 8
	BACKFILL			GE	45° WEDGE	H01576	∞
	E NON-EXPANSIVE	us		•	2' PANEL	HP302	2
VINYLLINER					3' PANEL	HP303	2
PANEL	-11ı— <i>-</i>			. (LIGHT)	4' PANEL (LIGHT	HP304L	_
POLYMER	POLYMER				4' PANEL	HP304	2
BENCHMARK				. (A/G)	6' PANEL (A/G	HP306A	_
COFANG	1			•	6' PANEL	HP306	10
2'6" OVERDIG	CONCRETE DECK APPROX 4" DEEP			NOIT	DESCRIPTION	PART	QTY
	OVERDIG DETAIL	OVER		S	OF MATERIALS		BILL
				•	_	4'3"	J
-K	- J -	-GI	+	1	P	4'3"	Н
					Z	4'3"	I
	- TI V				S	<u>ه</u>	G
	-				T	6	П
B	T	A	1		M2	2'8"	Е
				4'3"	Z	3'4"	D
GALLONS 17000	88'1"	PERIMETER	PER	24'	_	32'6"	B
SQ. FOOTAGE 536	0	APSP TYPE	AP	0	~	16'6"	⋗

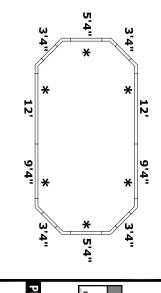

It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels

ATTENTION DEALER/BUILDER:


are properly installed.

ACCORDING TO APSP SPECIFICATIONS 'NO DIVING' WARNING LABELS MUST BE

ADANGER

INSTALLED IN NO DIVING AREAS

NO DIVING
SHALLOW WATER
MAY CAUSE DEATH OR PERMANENT INJURY

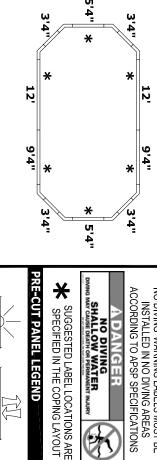





HGHT

AQUAGENIE 191

CORNERSTONE 16'6" X 32'6" GRECIAN - WEDGE

30212

Copyright © 2007 by Hydra Pools

υσευπεντι ID: HF5300, Comerstone Standard Panel Layout Drawing Rev Date: 1216/2005 Rev Level: A

Dimensions are from inside pool panels.
 The ideal water level should be to the mi

hese are finished dimensions ready for the liner.

The ideal water level should be to the middle of the skimmer opening(s).

GENERAL NOTES