

16'6" X 39' GRECIAN LAZY-ELL RIGHT 8' COZY COVE (optional) -3 6' PANELS +2 4' PANELS -1 3'PANEL +2 2'6" PANEL

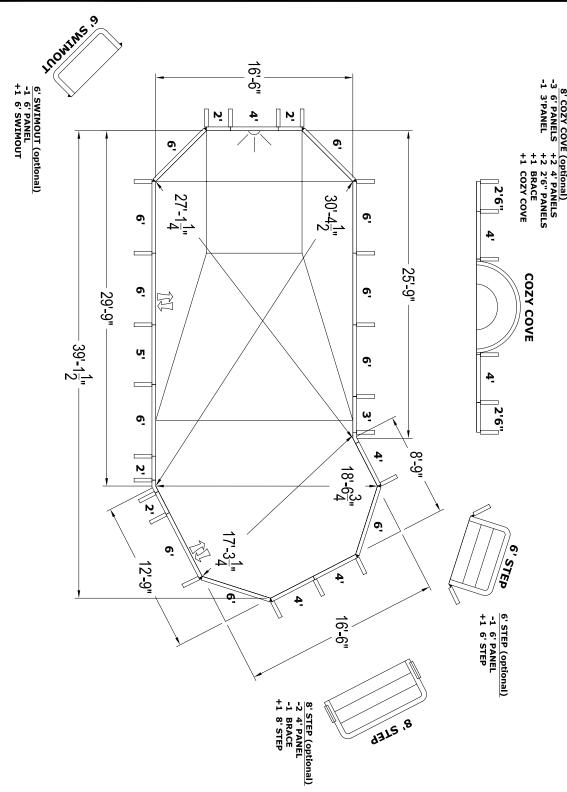

22 6 BILL OF MATERIALS $\boldsymbol{\varpi}$ DIMENSIONS m U | H01576 | 45° WEDGE HP302 | 2' PANEL HP303 3' PANEL HP304L | 4' PANEL (LIGHT HP306A | 6' PANEL (A/G) HP306 | 6' PANEL HP399 | BRACE HP304 | 4' PANEL HP305 5' PANEL HP320 HP321 PART 16'6" 29'9" <u>چ</u> 4<u>3</u> 4'8 3'4<u>"</u> 43 ∞ ∞ REV 30° LAZY-ELL PANEL DESCRIPTION 30° LAZY-ELL PANEL U Z S 3 14'10% 25'9" 12'9" 8<u>9</u> 16'6" 4 <u>ත</u> PERIMETER 100'1" **APSP TYPE** OVERDIG DETAIL USE NON-EXPANSIVE MATERIAL FOR BACKFILL CONCRETE BOND BEAM 6" TO 8" DEEP UNDISTURBED EARTH APPROX 4" DEEP POLYMER Ħ SQ. FOOTAGE 2'6" OVERDIG-GALLONS COPING PANEL VINYL LINER BENCHMARK 19986 635

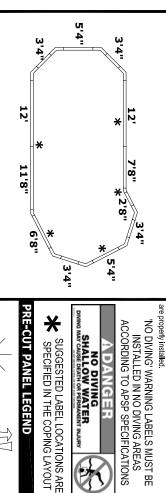

NO DIVING
SHALLOW WATER
MAY CAUSE DEATH OR PERMANENT INJURY

ADANGER

COPING LAYOUT


*NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO


NO DIVING WARNING

ATTENTION DEALER/BUILDER

It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels

INSTALLED IN NO DIVING AREAS

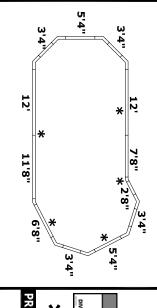

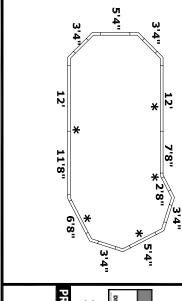





JAN 2007 |

16'6" X 39' GRECIAN LAZY-ELL RIGHT

HGHT

AQUAGENIE 191

30411

Dimensions are from inside pool panels.
 The ideal water level should be to the middle of the skimmer opening(s).

2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See 'Overdig Detail' for excavation around pool.
5. Fill voids under base of panels and tamp well.

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an

Proper installation is the responsibility of the dealer/builder/contractor.

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

ADDITIONAL NOTES

EXCAVATION NOTES

Rough excavation should be 2" deeper in each instance.

hese are finished dimensions ready for the liner.

GENERAL NOTES