## 17' X 34' KIDNEY RIGHT

ம

32

PERIMETER **APSP TYPE** 

88'8"

H

SQ. FOOTAGE

GALLONS

19580 686 DIMENSIONS


17!

U


3'4"

3

9 4

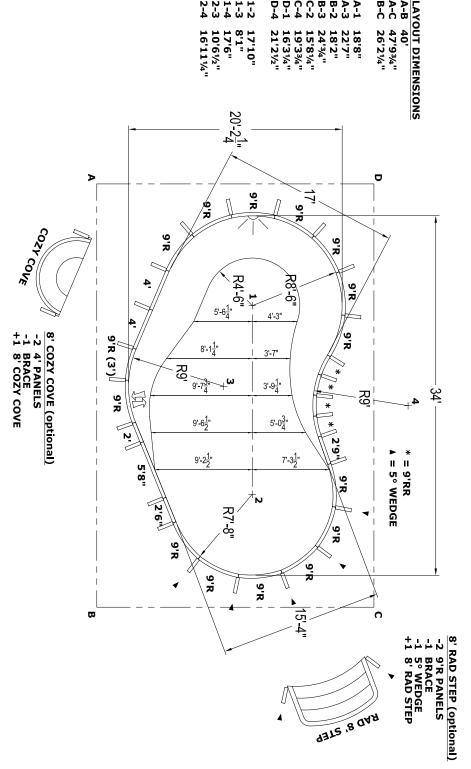

## ٩Ę٩ 25 12 | HP359 | 9'R PANEL BILL OF MATERIALS m |HP359LL| 9'R PANEL (LIGHT HP126 | 5° WEDGE HP319N | 9'R REVERSE HP125D | (9'R) 3' ROMAN INSERT HP359A | 9'R PANEL (A/G) HP383S | 2'6" SPECIAL PANEL HP302 | 2' PANEL HP317 | 2'9" SPECIAL PANEL HP304 HP318 | 5'8" SPECIAL PANEL PART 48 4 ဖွ $\infty$ DESCRIPTION 4' PANEL Z S 20'21/4 15'4" OVERDIG DETAIL \*NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO. CONCRETE BOND BEAM 6" TO 8" DEEP JNDISTURBED EARTH APPROX 4" DEEP BRACE - 2'6" OVERDIG — POLYMER VINYL LINER BENCHMARK

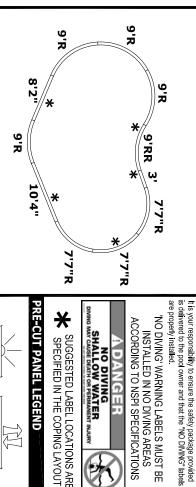



ADANGER

COPING LAYOUT

**NO DIVING WARNING** 

ATTENTION DEALER/BUILDER:



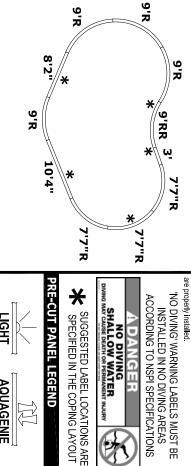



HGHT

AQUAGENIE 131

CORNERSTONE | 17' X 34' KIDNEY RIGHT

30721

Copyright © 2007 by Hydra Pools

Dimensions are from inside pool panels.
 The ideal water level should be to the middle of the skimmer opening(s).

2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See 'Overdig Detail' for excavation around pool.
5. Fill voids under base of panels and tamp well.

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an

Proper installation is the responsibility of the dealer/builder/contractor.

**JAN 2007** 

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

ADDITIONAL NOTES

**EXCAVATION NOTES** 

Rough excavation should be 2" deeper in each instance.

hese are finished dimensions ready for the liner.

**GENERAL NOTES**