
## 18' X 34'10" KIDNEY RIGHT



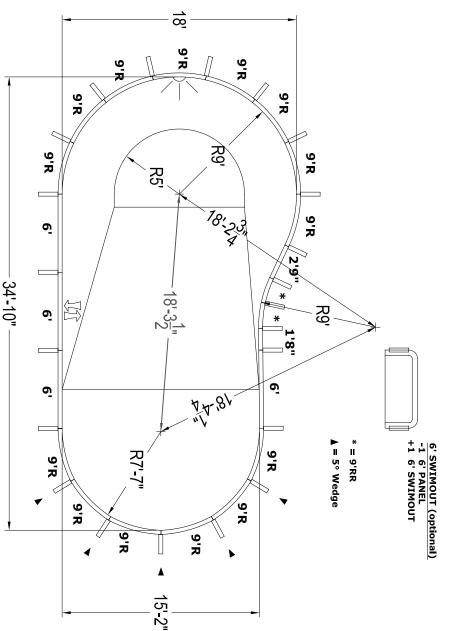

COPING LAYOUT

**NO DIVING WARNING** 

ATTENTION DEALER/BUILDER:



8' COZY COVE (optional)
-2 6' PANELS
-1 6' A\G PANEL
+2 5' PANELS
+1 8' COZY COVE

ΩĪ

ហ្ម

COZY COVE

## ADDITIONAL NOTES

**EXCAVATION NOTES** 

1. Rough excavation should be 2" deeper in each instance.
2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See "Overdig Detail" for excavation around pool.
5. Fill voids under base of panels and tamp well.
6. Backfill with non-expansive material. Rough excavation should be 2" deeper in each instance. THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an Proper installation is the responsibility of the dealer/builder/contractor.


**JAN 2007** 

CORNERSTONE


		22	5	2	_	13	_	_	_	З	ΩŢ	BILI	J	н	I	G	П	т	D	B	Α	DIM
		HP399	HP126	HP319N	HP359LL	HP359	HP316	HP317	HP306A	HP306	PART	<b>BILL OF MATERIALS</b>	4'	4	4	10'	8	4'8"	3'4"	34'10"	18'	DIMENSIONS
		BRACE	5° WEDGE	9'R REVERSE	9'R PANE	9'R PANEL	1'8" SPE	2'9" SPE	6' PANEL (A/G)	6' PANEL	DESCRIPTION	TERIAL	_	7	z	S	-	M2	<b>=</b>	_	_	S
			H	ERSE (*)	HP359LL 9'R PANEL (LIGHT)	٣	1'8" SPECIAL PANE	2'9" SPECIAL PANEL	- (A/G)		NOIT	S	1	<u>ه</u>			15'2"	•	10'10"	14'	6	
*NOTE	CO	Ç					EL	EL				OVER		-H-I-I-I				A		PERIMETER	APSP TYPE	
PERIMETER TO IN	CONCRETE BOND BEAM 6" TO 8" DEEP	UNDISTURBED EARTH		MATERIAL FOR —	ON-EXPANSIVE	<u></u>		POLYMER			CONCRETE DECK	OVERDIG DETAIL		- <b>J</b>	-п		<b>J</b> -			89'2"	II	
*NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO		OR S								COP	2'6" OVERDIG			-K						GALLONS	SQ. FOOTAGE	
NORE INFO.	7/	2' VERMICULITE OR SAND BOTTOM			ļ	VINVI I INFR	PANEL		BENCHMARK	ING	ALUMINUM			<b>M</b>				<u> </u>		17551	627	


8' STEP (optional)
-2 9' RADIUS

-1 5° WEDGE -1 BRACE +1 RAD 8' STEP

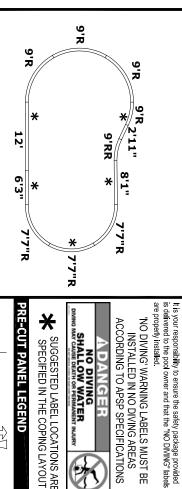

ADANGER



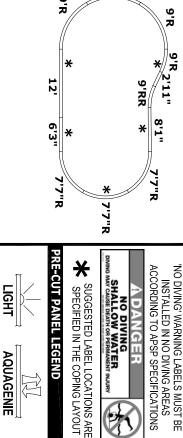





AQUAGENIE 191



30731

υσευπεντι ID: HF5300, Comerstone Standard Panel Layout Drawing Rev Date: 1216/2005 Rev Level: A

Dimensions are from inside pool panels.
 The ideal water level should be to the middle of the skimmer opening(s).

hese are finished dimensions ready for the liner.

**GENERAL NOTES** 

Copyright © 2007 by Hydra Pools