18' X 36' RECTANGLE 4' RADIUS - BOWTIE

DIMENSIONS

ᅘ


ΩĪ

APSP TYPE

0

SQ. FOOTAGE

648

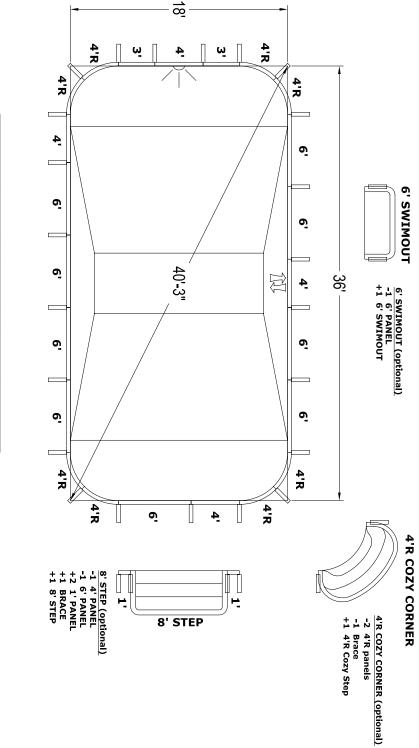

٩Ę٩ COPING LAYOUT BILL OF MATERIALS Б m U 10 HP304L 4' PANEL (LIGHT HP304A | 4' PANEL (A/G) HP306 | 6' PANEL HP354 | 4'R PANEL HP303 | 3' PANEL HP304 PART 10'6" 3'4" 28 4 ගු 36 4' PANEL DESCRIPTION U Z S ⋜ 12 12 × 10'6" ΩĪ رت 12 12 PERIMETER 101'2" OVERDIG DETAIL *NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO. USE NON-EXPANSIVE MATERIAL FOR BACKFILL CONCRETE BOND BEAM 6" TO 8" DEEP APPROX 4" DEEP 10' STURBED BRACE m-∔□ 3/8" REBAR WHERE NEEDED AROUND-PERIMETER OF BOND BEAM -M2-**NO DIVING WARNING** It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels are properly installed. ATTENTION DEALER/BUILDER PRE-CUT PANEL LEGEND SUGGESTED LABEL LOCATIONS ARE SPECIFIED IN THE COPING LAYOUT ACCORDING TO APSP SPECIFICATIONS 'NO DIVING' WARNING LABELS MUST BE NO DIVING SHALLOW WATER MAY CAUSE DEATH OR PERMANENT INJURY **INSTALLED IN NO DIVING AREAS** - 2'6" OVERDIG ADANGER GALLONS 131 COPING OR SAND BOTTOM PANEL BENCHMARK VINYL LINER 18852

ADDITIONAL NOTES

1. Rough excavation should be 2" deeper in each instance.
2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locale top of pool at least 0" above surrounding land elevation.
4. See 'Overdig Detail' for excavation around pool.
5. Fill voids under base of panels and tamp well. Rough excavation should be 2" deeper in each instance.

EXCAVATION NOTES

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. Proper installation is the responsibility of the dealer/builder/contractor. **JAN 2007**



E

AQUAGENIE



CORNERSTONE 18' X 36' RECTANGLE 4' RADIUS - BOWTIE

30148

υσευπεστ ID: HF5300, Comerstone Standard Panel Layout Drawing Rev Date: 1216/2005 Rev Level: A

Dimensions are from inside pool panels.
 The ideal water level should be to the middle of the skimmer opening(s).

hese are finished dimensions ready for the liner.

GENERAL NOTES

Q

4

4

ο

COZY COVE

8' COZYCOVE (optional)
-2 6' PANELS
+1 4' PANEL
+1 8' COZY COVE

Copyright © 2007 by Hydra Pools.