

Б

DIMENSIONS


m U



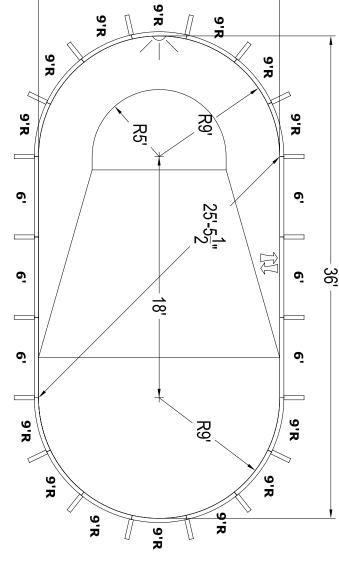

E9

ᅘ




It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels

INSTALLED IN NO DIVING AREAS


ADANGER


ATTENTION DEALER/BUILDER

8' STEP (optional)
-3 9' RADIUS
+2 (9'R) 2' OVAL INSERT
+1 RADIUS 8' STEP

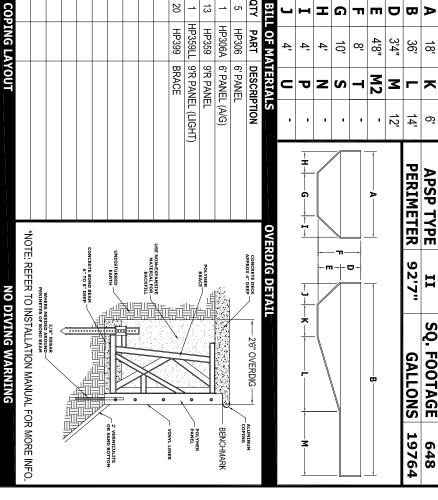

٩Ę٩






ω


σį

COZY COVE

-3 6' PANLS +2 5' PANELS +1 8' COZY COVE

8' COZY COVE (optional)

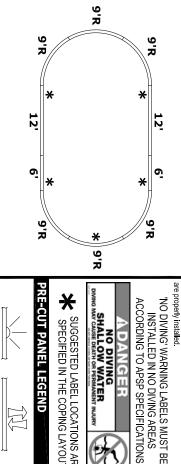

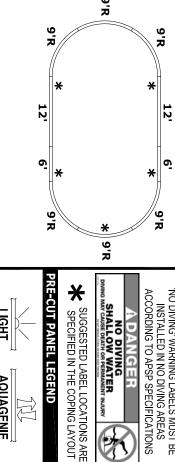



HGHT

AQUAGENIE 191

CORNERSTONE 18' X 3	PANEL LINE DRAWING TITLE	543 Sou
18' X 36' OVAL	ILE	543 South Main Street - Sweetwater, TN 37874

uucument ID: HF5300, Comerstone Standard Panel Layout Drawing Rev Date: 126/2005 Rev Level: A

Dimensions are from inside pool panels.
 The ideal water level should be to the middle of the skimmer opening(s).

1. Rough excavation should be 2" deeper in each instance.
2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locale top of pool at least 0" above surrounding land elevation.
4. See 'Overdig Detail' for excavation around pool.
5. Fill voids under base of panels and tamp well.

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an

Proper installation is the responsibility of the dealer/builder/contractor.

JAN 2007

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

ADDITIONAL NOTES

EXCAVATION NOTES

Rough excavation should be 2" deeper in each instance.

hese are finished dimensions ready for the liner.

GENERAL NOTES

Copyright © 2007 by Hydra Pools

30320