33'-8<u>-</u>"

9 R

9'R

ō

ο

ο

ᅘ

28'-6"

41'-2<u>1</u>"

6' SWIMOUT

6' SWIMOUT (optional) -1 6' PANEL +1 6' SWIMOUT

9'R

9'R

12'

2'6"4'

9'R


12

ᅘ

9'R

18' X 41'2" LAZY-ELL OVAL RIGHT







 $\boldsymbol{\varpi}$

28'6"

4 <u>ත</u>

PERIMETER 104'6"

NSPI TYPE

H

SQ. FOOTAGE

GALLONS

22449 756

형

DIMENSIONS

m U

4'8 3'4<u>"</u>

3

17'21/2'

0 ∞


S

ᅘ 24

ᅘ

Z

13'6"

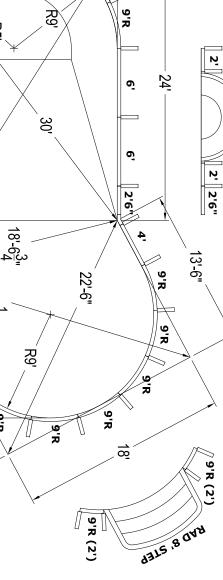

9'R

RAD 8' STEP (optional) -3 9' RADIUS PANELS +2 (9'R) 2' OVAL INSERT PANELS +1 RAD 8' STEP BILL OF MATERIALS 4

٩Ę٩ 13 | HP359 | 9'R PANEL |HP359LL| 9'R PANEL (LIGHT) HP383S | 2'6" SPECIAL PANEL HP306A | 6' PANEL (A/G) HP301 | 1' PANEL HP304 | 4' PANEL HP306 | 6' PANEL HP320 PART REV 30° LAZY-ELL PANEL 30° LAZY-ELL PANEL DESCRIPTION OVERDIG DETAIL

CONCRETE BOND BEAM 6" TO 8" DEEP UNDISTURBED EARTH APPROX 4" DEEP BRACE - 2'6" OVERDIG -POLYMER VINYL LINER BENCHMARK

NO DIVING WARNING

*NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO.

3/8" REBAR WHERE NEEDED AROUND-PERIMETER OF BOND BEAM

COPING LAYOUT

are properly installed. It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels ATTENTION DEALER/BUILDER

NO DIVING' WARNING LABELS MUST BE INSTALLED IN NO DIVING AREAS




NO DIVING
SHALLOW WATER
MAY CAUSE DEATH OR PERMANENT INJURY

SUGGESTED LABEL LOCATIONS ARE SPECIFIED IN THE COPING LAYOUT

9'R

PRE-CUT PANEL LEGEND







18' X 41'2" LAZY-ELL OVAL RIGHT

30471

υνουπεκτ ID: HF5300, Comerstone Standard Panel Layout Drawing Rev Date: 12l6/2005 Rev Level: A

Dimensions are from inside pool panels.
 The ideal water level should be to the middle of the skimmer opening(s).

2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See 'Overdig Detail' for excavation around pool.
5. Fill voids under base of panels and tamp well.

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply

The dealer or contractor who sells or installs your pool is an independant contractor and is not an

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

ADDITIONAL NOTES

EXCAVATION NOTES

Rough excavation should be 2" deeper in each instance.

hese are finished dimensions ready for the liner.

GENERAL NOTES

only to normal ground conditions. There may be additional precautions and/or methods of Proper installation is the responsibility of the dealer/builder/contractor. **JAN 2007** CORNERSTONE

Copyright © 2007 by Hydra Pools