18'10" X 36'10" CONTOUR BTM. GRECIAN 4' RADIUS 6' SWIMOUT 6' SWIMOUT (optional) -1 6' PANEL +1 6' SWIMOUT

DIMENSIONS

18'10"

大


66

APSP TYPE

H

SQ. FOOTAGE

694

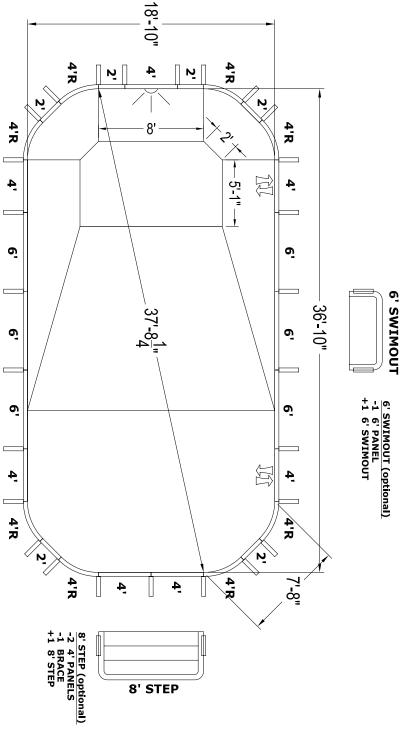

8' STEP

ADDITIONAL NOTES

Rough excavation should be 2" deeper in each instance.

EXCAVATION NOTES

- Dimensions are from inside pool panels.
 The ideal water level should be to the mi The ideal water level should be to the middle of the skimmer opening(s).


GENERAL NOTES

hese are finished dimensions ready for the liner.

- 1. Rough excavation should be 2" deeper in each instance.
 2. Soil to have minimum bearing capacity of 2000 P.S.F.
 3. Locate top of pool at least 6" above surrounding land elevation.
 4. See "Overdig Detail" for excavation around pool.
 5. Fill voids under base of panels and tamp well.
 6. Backfill with non-expansive material.
 - THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

The dealer or contractor who sells or installs your pool is an independant contractor and is not an agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of Proper installation is the responsibility of the dealer/builder/contractor.

COPING LAYOUT						27 HP399 BRACE	-	6 HP302 2' PANEL	2 HP304A 4' PANEL (A/G)	1 HP304L 4' PANEL (LIGHT)	4 HP304 4' PANEL	6 HP306 6' PANEL	QTY PART DESCRIPTION	BILL OF MATERIALS	J 4' U 26'	I 4' P 5'1"	4' N 8'	G 10'10" S 7'8"	F 8' T 8'	E 4'8" M2 -	D 3'4" M 12'4"	B 36'10" L 14'
NO DI	* NOTE: REFER TO IN	WHERE NEI PERIMETER O	6" TO 8" DEEP	CONCRETE BOND BEAM	UNDISTURBED	BACKFILL	USE NON-EXPANSIVE		Division I	POLYMER			CONCRETE DECK	OVERDIG DETAIL		H-H		- 11	7 -	A		PERIMETER 101'2"
NO DIVING WARNING	* NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO.	3/8" REBAR WHERE NEEDED AROUND— PERIMETER OF BOND BEAM			2. VERMICULITE	•	•	VINYL LINER	POLYMER	•	BENCHMARK	COPING	2'6" OVERDIG			K L M M				B		GALLONS 24,143



ο

ω

ω

9

COZY COVE

8' COZYCOVE (optional)
-1 6' PANEL
-2 4' PANELS
+2 3' PANELS
+1 8' COZY COVE

It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels are properly installed 'NO DIVING' WARNING LABELS MUST BE ACCORDING TO NSPI SPECIFICATIONS NO DIVING
SHALLOW WATER
MAY CAUSE DEATH OR PERMANENT INJURY INSTALLED IN NO DIVING AREAS ADANGER

ATTENTION DEALER/BUILDER:



PRE-CUT PANEL LEGEND



E

AQUAGENIE 19



| 18'10" X 36'10" CONT BTM GREC 4'RAD

JAN 2007

CORNERSTONE

30992