Б

형

<u>ත</u>

APSP TYPE

H

SQ. FOOTAGE


GALLONS

22238 675


28'6"


4

PERIMETER 110'2"

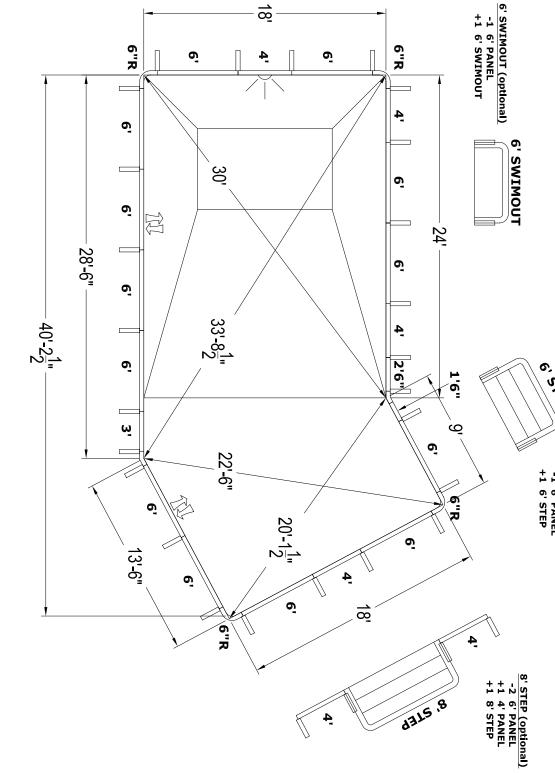


25 COPING LAYOUT BILL OF MATERIALS m U |HP156D | 6"R PANEL HP382S | 1'6" SPECIAL PANEL HP383S | 2'6" SPECIAL PANEL HP304L | 4' PANEL (LIGHT HP304 4' PANEL HP306A | 6' PANEL (A/G) HP399 | BRACE HP303 | 3' PANEL HP306 | 6' PANEL HP320 | REV 30° LAZY-ELL PANEL HP321 | 30° LAZY-ELL PANEL PART 4'8" 3'4<u>"</u> 4 0 ∞ DESCRIPTION U Z S 3 16'21/2' 13'6" ശ 24 ᅘ OVERDIG DETAIL *NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO CONCRETE BOND BEAM 6" TO 8" DEEP UNDISTURBED EARTH APPROX 4" DEEP POLYMER **NO DIVING WARNING** 2'6" OVERDIG-COPING PANEL BENCHMARK VINYL LINER

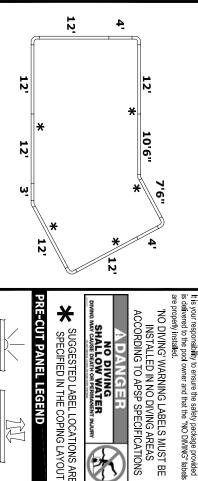

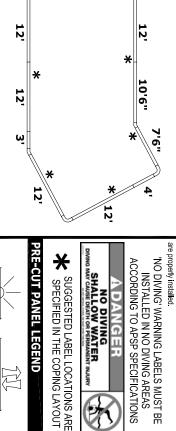

ATTENTION DEALER/BUILDER

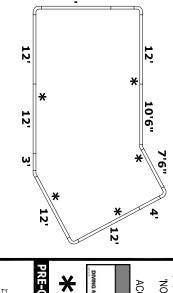



HGHT

AQUAGENIE R

uocument ID: HF5300, Comerstone Standard Panel Layout Drawing Rev Date: 126/2005 Rev Level: A

Dimensions are from inside pool panels.
 The ideal water level should be to the middle of the skimmer opening(s).

2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See 'Overdig Detail' for excavation around pool.
5. Fill voids under base of panels and tamp well.

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an

Proper installation is the responsibility of the dealer/builder/contractor.

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

ADDITIONAL NOTES

EXCAVATION NOTES

Rough excavation should be 2" deeper in each instance.

hese are finished dimensions ready for the liner.

GENERAL NOTES

Copyright © 2007 by Hydra Pools.

30421