
18' X 36' MARTINIQUE LEFT 2'R

D


688


PERIMETER



REV.

24825

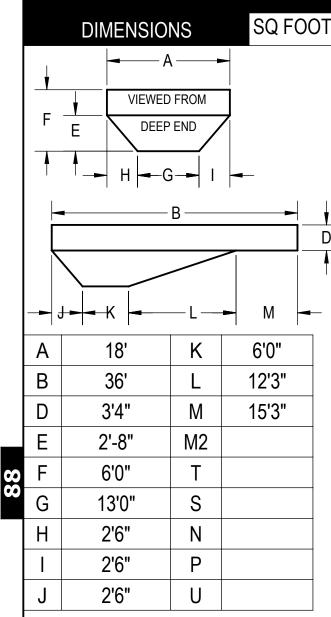

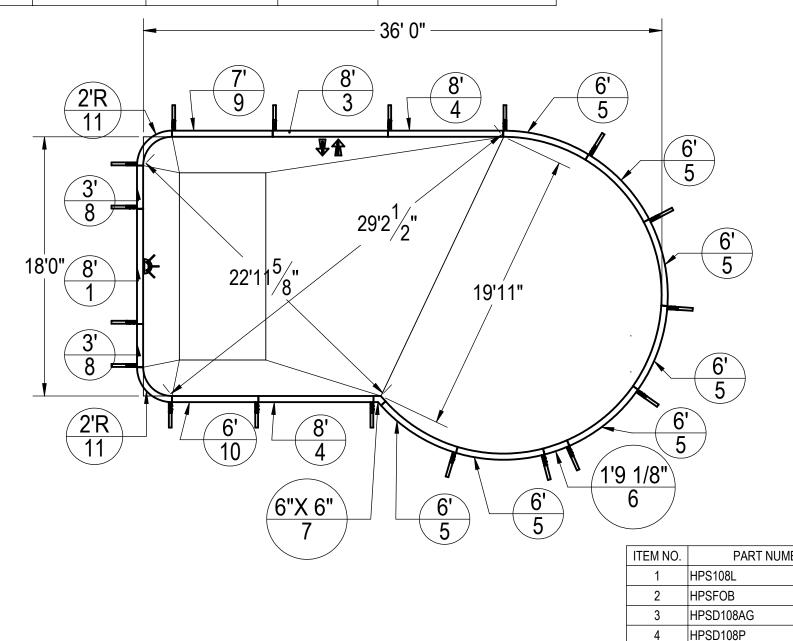

NOTES:

- THESE ARE FINISHED DIMENSIONS READY FOR THE LINER.
- 2. 3. DIMENSIONS ARE FROM INSIDE POOL PANELS.
- THE IDEAL WATER LEVER SHOULD BE TO THE MIDDLE OF THE SKIMMER OPENING(S)

EXCAVATION NÓTES

- ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE. SOIL TO HAVE MINIMUM BEARING CAPACITY OF 2000 PSF.
- 5.
- LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND 6. FI EVATION.
- SEE "OVER DIG DETAIL" FOR EXCAVATION AROUND POOL. 7.
- FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL. 8.
- BACK FILL WITH NON-EXPANSIVE MATERIAL. 9

IMPORTANT NOTES:

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.





102'

GALLONS

"NO DIVING" WARNING LABELS MUST BE

INSTALLED IN NO DIVING AREAS ACCORDING TO ANSI SPECIFICATIONS

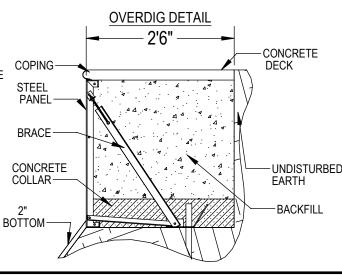

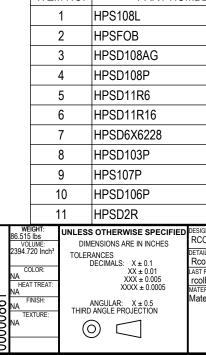


I/UPD	ATE	D\6	038	9


		PART NUMBER: 60389	SCALE: SIZ	7
TERIAL: aterial <not speci<="" td=""><td></td><td></td><td></td><td></td></not>				
ST REVISED BY: LAST REVISED DATE: colboch 11/16/2012				
TAILED BY: colboch	DETAILED DATE: 8/30/2012	BY HYDRA POOLS		
SIGNED BY: COLBOCH	10/17/2012	SAMSON STEEL		
	CREATION DATE:	2'R PANEL		
		1		
		1		
		2		
		1		
		1		
		7		
		2		
	8' AG PANEL 8' PLAIN PANEL			
		18		
	STEEL BRACE			
		8' LIGHT PANEL		
BER		QTY.		

REVISION HIST		OTATUO		DV
	DATE	STATUS	ECO	BY

18' X 36' MARTINIQUE LEFT 2'R

DESCRIPTION

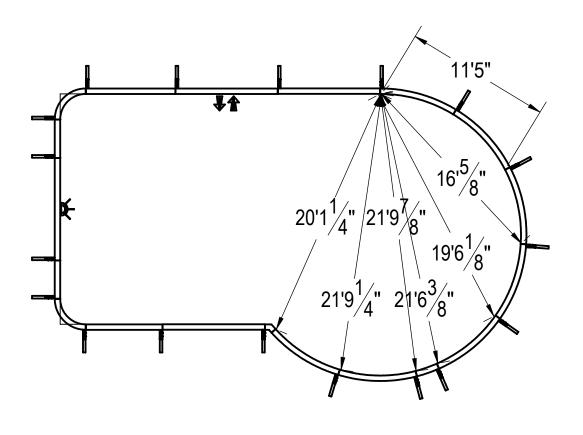

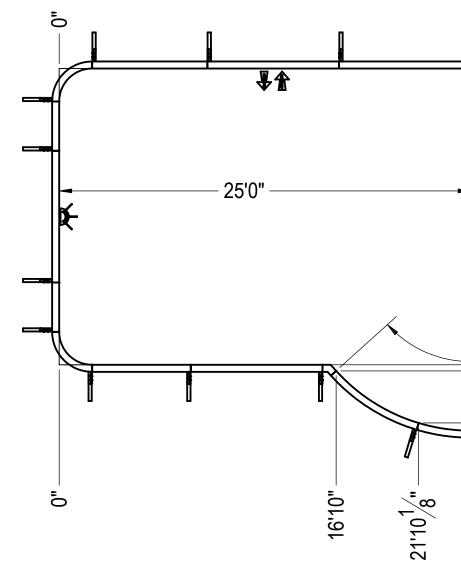

REV.

NOTES:

88A


- THESE ARE FINISHED DIMENSIONS READY FOR THE LINER.
- DIMENSIONS ARE FROM INSIDE POOL PANELS. 2. 3.
- THE IDEAL WATER LEVER SHOULD BE TO THE MIDDLE OF THE SKIMMER OPENING(S)

EXCAVATION NOTES:


- ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE. SOIL TO HAVE MINIMUM BEARING CAPACITY OF 2000 PSF.
- 5.
- LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND 6. ELEVATION.
- SEE "OVER DIG DETAIL" FOR EXCAVATION AROUND POOL. 7.
- FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL. 8.
- BACK FILL WITH NON-EXPANSIVE MATERIAL. 9

IMPORTANT NOTES:

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.



INSTALLED IN NO DIVING AREAS ACCORDING TO ANSI SPECIFICATIONS

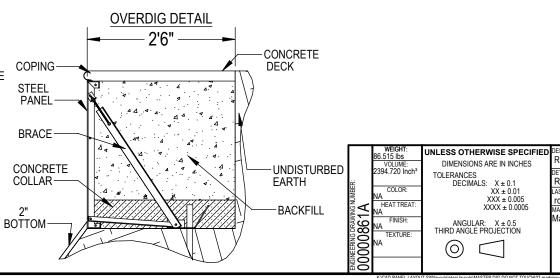

REVISIO	ON HISTOR	Y			
		DATE	STATUS	ECO	BY
	30.8 ¹ / ₁	35'11 ⁵ °"		16 12	$54\frac{7}{8}$ " $3\frac{3}{8}$ " $4\frac{7}{2}$ " $5\frac{1}{2}$ "
SIGNED BY: COLBOCH	CREATION DATE: 10/17/2012		SVMO	ON STEE	
TAILED BY:	DETAILED DATE: 8/30/2012			RA POOL	
ST REVISED BY:	LAST REVISED DATE:	TITLE: 18'	X 36' MAF		
colboch ITERIAL:	11/14/2012				
aterial <not specified=""></not>					
		PART NUMBER:	60389	A	SCALE: 1:96 SHEET: 1.0F 1 B

e\UPDATED\60389-A	