19'8" X 35'11" BALIZE

 $\boldsymbol{\varpi}$

35'10%"

4 <u>ත</u>

PERIMETER 100'10"

APSP TYPE

H

SQ. FOOTAGE

GALLONS

25,404 706

18'3"

m U

48 3'4<u>"</u>

3

11'10%


 ∞

10'3"

4

Z

DIMENSIONS

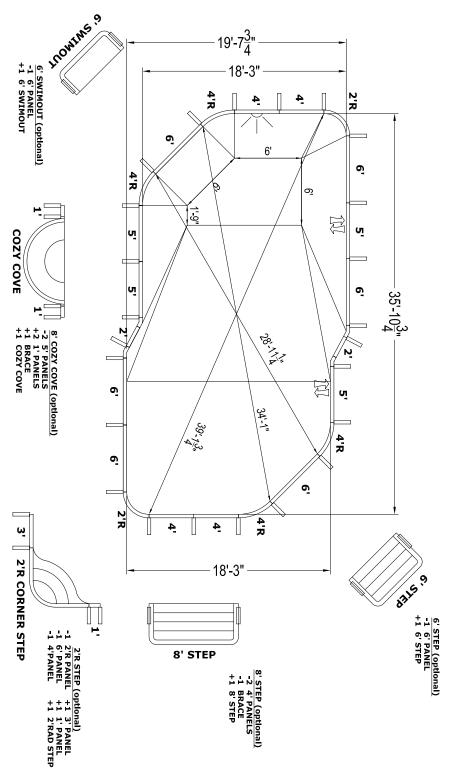

BILL OF MATERIALS

OVERDIG DETAIL

٩Ę٩ 24 COPING LAYOUT | HP302 | 2' PANEL HP305A 5' PANEL (A/G) HP352M | 2'R PANEL HP304L | 4' PANEL (LIGHT HP354 | 4'R PANEL HP304 | 4' PANEL HP306 | 6' PANEL HP399 | BRACE HP321 | 30° LAZY-ELL PANEL HP305 HP320 | REV 30° LAZY-ELL PANEL PART 5' PANEL DESCRIPTION 12 ö 12 *NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO CONCRETE BOND BEAM 6" TO 8" DEEF APPROX 4" DEEP POLYMER STURBED 3/8" REBAR WHERE NEEDED AROUND-PERIMETER OF BOND BEAM It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels **NO DIVING WARNING** are properly installed. ATTENTION DEALER/BUILDER: PRE-CUT PANEL LEGEND SUGGESTED LABEL LOCATIONS ARE SPECIFIED IN THE COPING LAYOUT 'NO DIVING' WARNING LABELS MUST BE ACCORDING TO NSPI SPECIFICATIONS ---- 2'6" OVERDIG -NO DIVING SHALLOW WATER MAY CAUSE DEATH OR PERMANENT INJURY **INSTALLED IN NO DIVING AREAS** ADANGER 131 COPING OR SAND BOTTOM POLYMER BENCHMARK VINYL LINER

υνουπεικτ ID: HF5300, Comerstone Standard Panel Layout Drawing Rev Date: 126/2005 Rev Level: A

hese are finished dimensions ready for the liner.

GENERAL NOTES

Dimensions are from inside pool panels.
 The ideal water level should be to the middle of the skimmer opening(s).

EXCAVATION NOTES

1. Rough excavation should be 2" deeper in each instance.
2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locale top of pool at least 6" above surrounding land elevation.
4. See "Overdig Detail" for excavation around pool.
5. Fill voids under base of panels and tamp well. Rough excavation should be 2" deeper in each instance.

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. ADDITIONAL NOTES

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an Proper installation is the responsibility of the dealer/builder/contractor.

JAN 2007

E

AQUAGENIE

CORNERSTONE | 19'8" X 35'11" BALIZE

30991