

20' X 40' RECTANGLE 6" RADIUS - WEDGE

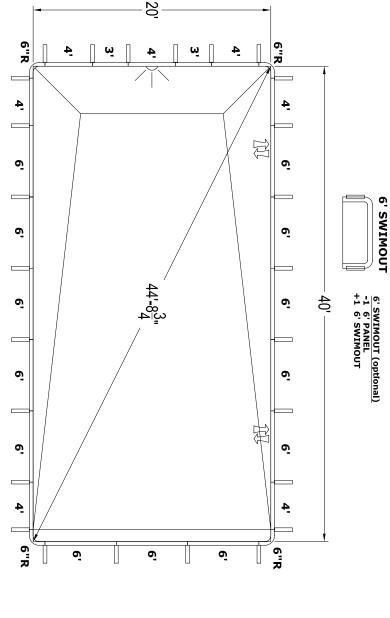



8' COZYCOVE (optional) -2 4' PANELS -1 6' PANELS +2 3' PANELS +1 8' COZY COVE

COZY COVE

ω

٥

<u>ن</u>

Q

Q

ω

ADDITIONAL NOTES

1. Rough excavation should be 2" deeper in each instance.
2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See "Overdig Detail" for excavation around pool.
5. Fill voids under base of panels and tamp well.
6. Backfill with non-expansive material. Rough excavation should be 2" deeper in each instance.

EXCAVATION NOTES

- Dimensions are from inside pool panels.
 The ideal water level should be to the mi The ideal water level should be to the middle of the skimmer opening(s).

GENERAL NOTES

hese are finished dimensions ready for the liner.

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

The dealer or contractor who sells or installs your pool is an independant contractor and is not an agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of Proper installation is the responsibility of the dealer/builder/contractor.


						HP399	HP156D	HP303	HP304L	HP304	HP306A	HP306	PART	. OF M/	4'	4'	4'	12'	<u>ට</u>	2'8"	3'4"	40'	20'
						BRACE	6"R PANEL	3' PANEL	4' PANEL (LIGHT)	4' PANEL	6' PANEL (A/G)	6' PANEL	DESCRIPTION	OF MATERIALS	U	v	Z	S	-	M 2	3	_	~
							틴		- (LIGHT)	1	- (A/G)		PTION	S	-		1	1	1	•	<u> -</u> -	35'	0
																-H				Α		PERIMETER	APSP TYPE
*NOTE			6,		UNDISTURBED EARTH	3	USE NON-EXPANSIVE			POL			CONCRE	OVERD		-1-	-			<u> </u>			PE
*NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO.	3/8" REBAR WHERE NEEDED AROUND PERIMETER OF BOND BEAM		6" TO 8" DEEP	Ī		BACKFILL	PANSIVE	iii.	iji	POLYMER			CONCRETE DECK APPROX 4" DEEP	OVERDIG DETAIL		-J- -K-	-m	1	-	<u> </u>		119'2"	0
								`	PAN	Po	-	*	—2'6" OVERDIG —-			<u> </u>				B		GALLONS	SQ. FOOTAGE
R MORE INFO.		*/			2' VERMICULITE OR SAND BOTTOM			VINYL LINER	PANEL	Y A STATE OF THE S	BENCHMARK	i	INUM			<u> </u>				*		25793	800

γŢ

311

G

тπ D **DIMENSIONS**

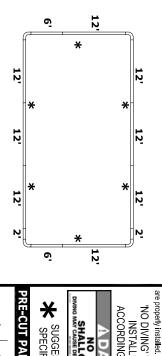

NO DIVING
SHALLOW WATER
MAY CAUSE DEATH OR PERMANENT INJURY


ADANGER

NO DIVING WARNING

ATTENTION DEALER/BUILDER:

It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels


INSTALLED IN NO DIVING AREAS

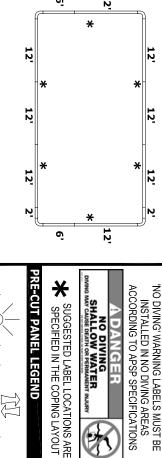



AQUAGENIE 191





20' X 40' RECTANGLE 6" RADIUS - WEDGE

JAN 2007

CORNERSTONE

30161