
## 20' X 44'4" LAZY-ELL LEFT 2' RADIUS

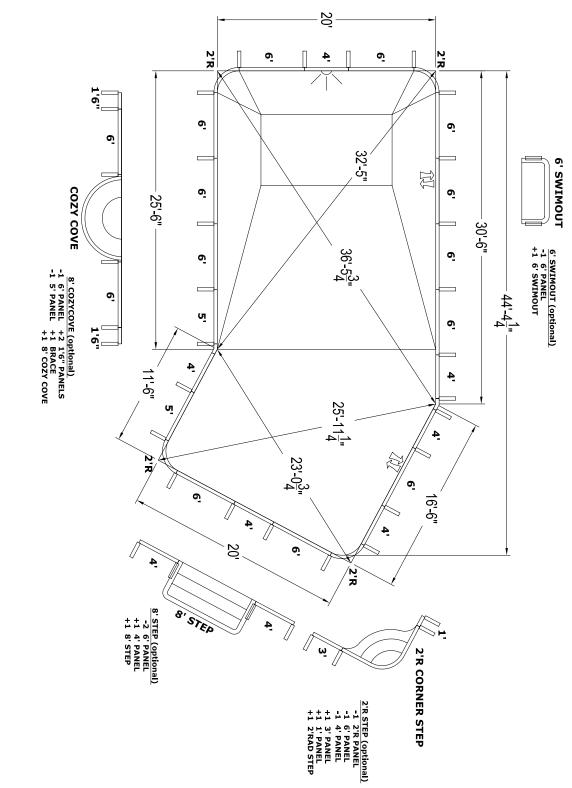

## ADDITIONAL NOTES

Rough excavation should be 2" deeper in each instance.

**EXCAVATION NOTES** 

1. Rough excavation should be 2" deeper in each instance.
2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See "Overdig Detail" for excavation around pool.
5. Fill voids under base of panels and tamp well.
6. Backfill with non-expansive material.

υνουπεκτ ID: HF5300, Comerstone Standard Panel Layout Drawing Rev Date: 12l6/2005 Rev Level: A

Dimensions are from inside pool panels.
 The ideal water level should be to the mi

hese are finished dimensions ready for the liner.

The ideal water level should be to the middle of the skimmer opening(s).

GENERAL NOTES

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. Proper installation is the responsibility of the dealer/builder/contractor.

**JAN 2007** 

CORNERSTONE

NO DIVING WARNING			YOUT	COPING LAYOUT	COL
*NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO.					
PERIMETER OF BOND BEAM					
3/8" REBAR					
CONCRETE BOND BEAM					
UNDISTURBED 2' VERMICULITE			BRACE	HP399	25
	L PANEL	REV 30° LAZY-ELL PANEL	REV 30	HP320	_
MATERIAL FOR SIGNAL SIG	NEL	30° LAZY-ELL PANEL	30° LAZ	HP321	1
USE NON-EXPANSIVE		NEL .	2'R PANEL	HP352M	4
VINVI TINEE		4' PANEL (LIGHT)	4' PANE	HP304L	1
POLYMER		I	4' PANEL	HP304	5
POLYMER THE THE POLYMER OF THE POLYM		1	5' PANEL	HP305	2
BENCHMARK		EL (A/G)	6' PANEL (A/G)	HP306A	2
_		11	6' PANEL	HP306	11
CONCRETE DECK APPROX 4" DEEP 2'6" OVERDIG —-		IPTION	DESCRIPTION	PART	QTY
OVERDIG DETAIL		LS	ATERIA	BILL OF MATERIALS	BIL
			U	4'	ſ
-I L M	H-HG	11'6"	P	4'	Ι
		25'6"	Z	4'	Н
- T		16'6"	S	12'	Ð
<b>7</b> -		Т	T	8'4"	F
	_	l	1	Ì	Ī

 $\boldsymbol{\varpi}$ 

30'6"

PERIMETER 120'7"

20'

大

6'6" 졍

**APSP TYPE** 

III

**SQ. FOOTAGE** 

GALLONS

27846 840

3'4<u>"</u>


3


18'101/

Ш U

ΩĪ

DIMENSIONS

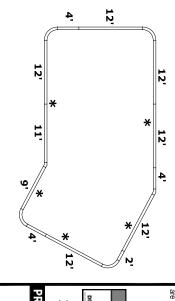

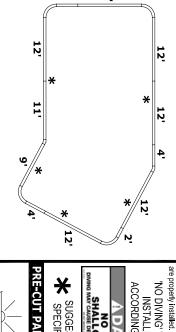


It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels

INSTALLED IN NO DIVING AREAS

ADANGER

ATTENTION DEALER/BUILDER:

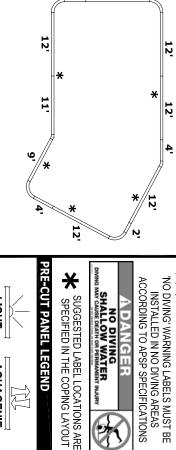





HGHT

AQUAGENIE R

20' X 44'4" LAZY-ELL LEFT 2' RADIUS

30455