

20'9" X 39'9" GRECIAN - BOW

DIMENSIONS





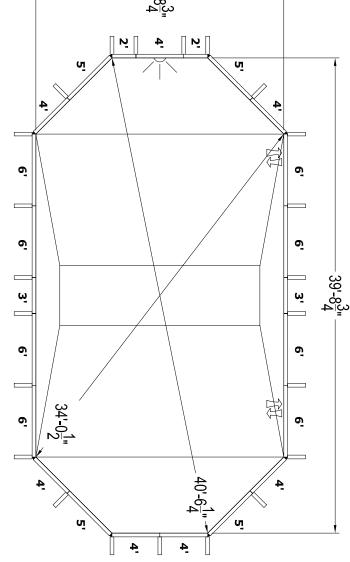

8' STEP (optional)
-2 4' PANEL
-1 BRACE
+1 8' STEP

COPING LAYOUT

GENERAL NOTES

- hese are finished dimensions ready for the liner.

- Dimensions are from inside pool panels.
 The ideal water level should be to the middle of the skimmer opening(s).
- 1. Rough excavation should be 2" deeper in each instance.
 2. Soil to have minimum bearing capacity of 2000 P.S.F.
 3. Locate top of pool at least 6" above surrounding land elevation.
 4. See "Overdig Detail" for excavation around pool.
 5. Fill voids under base of panels and tamp well.
 6. Backfill with non-expansive material.


ADDITIONAL NOTES

EXCAVATION NOTES

Rough excavation should be 2" deeper in each instance. THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply The dealer or contractor who sells or installs your pool is an independent contractor and is not an only to normal ground conditions. There may be additional precautions and/or methods of Proper installation is the responsibility of the dealer/builder/contractor.

					23	8	2	2	_	6	4	2	6	QTY	BIL	J	н	I	മ	F	т	o	m	A
					HP399	H01576	HP302	HP303	HP304L	HP304	HP305	HP306A	HP306	PART	BILL OF MATERIALS	11'	2	2'	16'9"	6'	2'8"	3'4"	39'9"	20'9"
					BRACE	45° WEDGE	2' PANEI	3' PANEL	4' PANEL (LIGHT)	4' PANEL	5' PANEL	6' PANEL (A/G)	6' PANEL	DESCRIPTION	TERIAI	U	P	Z	S	T	™ 2	3	_	_
)GE			L (LIGHT)	L		L (A/G)		PTION	S					•	6'41/2"	6'41/2"	1	5
																	-H				A		PERIMETER	APSP TYPE
NOTE	:) !			CONCR	UNDI		3	USE NO						COI	OVERD:		<u>T</u>		- TI -	_ -				PE
REFER TO II	WHERE			CONCRETE BOND BEAM 6" TO 8" DEEP	UNDISTURBED		USE NON-EXPANSIVE MATERIAL FOR BACKFILL		·	 	POLYMER		; 	CONCRETE DECK	OVERDIG DETAIL		- J-			5 -	1		106'	0
*NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO.	WHERE NEEDED AROUND PERIMETER OF BOND BEAM	3/8" REBAR							VINVL LINER					2'6" OVERDIG			K - L	-			В-		GALLONS	SQ. FOOTAGE
R MORE INFO.))) ! !		7	<i>y/</i>	2' VERMICULITE					POLYMER PANEL		- BENCHMARK	COPING	ALUMINUM			X						21751	824



4

4

4

8' COZYCOVE (optional)
-4 6' PANELS
-1 3' PANEL
+4 4' PANELS
+2 1'6" PANELS
+2 BRACES
+1 8' COZY COVE

COZY COVE

It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels are properly installed. ATTENTION DEALER/BUILDER: 'NO DIVING' WARNING LABELS MUST BE

NO DIVING WARNING

ACCORDING TO APSP SPECIFICATIONS INSTALLED IN NO DIVING AREAS



SUGGESTED LABEL LOCATIONS ARE SPECIFIED IN THE COPING LAYOUT

RE-CUT PANEL LEGEND











JAN 2007

CORNERSTONE

30252