

## 20'9" X 39'9" GRECIAN CONTOUR BOTTOM

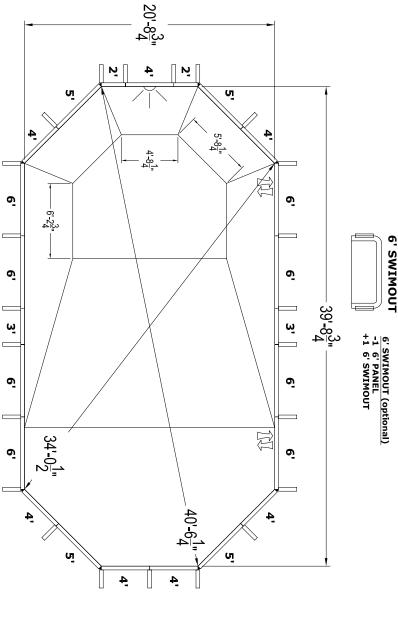



COPING LAYOUT

**NO DIVING WARNING** 

ATTENTION DEALER/BUILDER

It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels

INSTALLED IN NO DIVING AREAS

ADANGER

## ADDITIONAL NOTES

1. Rough excavation should be 2" deeper in each instance.
2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See "Overdig Detail" for excavation around pool.
5. Fill voids under base of panels and tamp well.
6. Backfill with non-expansive material. Rough excavation should be 2" deeper in each instance.

**EXCAVATION NOTES** 


Dimensions are from inside pool panels.
 The ideal water level should be to the middle of the skimmer opening(s).

hese are finished dimensions ready for the liner.

**GENERAL NOTES** 

The dealer or contractor who sells or installs your pool is an independant contractor and is not an agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. Proper installation is the responsibility of the dealer/builder/contractor.

A 2078%   K 103"   APSP TYPE   II   SQ. FOOTAGE   824												1											
APSP TY    L			23	∞	2	2	_	6	4	2	6	ΩŢ	311	J	н	ェ	മ	71	ш	D	ᄍ	➤	DIM
APSP TY    L			_				_		_	_			OF MA	4'	4'	4'	12'8¾"	81	4'8"	3'4"	39'83/,"	20'83/,"	ENSION
10'3" APSP TYI 14' PERIMETI 15'3'4" ————————————————————————————————————			BRACE	45° WEDO	2' PANEL	3' PANEL	4' PANEL	4' PANEL	5' PANEL	6' PANEL	6' PANEL	DESCRIP	TERIAL	_	v	Z		T	<b>₹</b>		_		S
ERIMETI  A  G  G  G  G  G  G  G  G  G  G  G  G				36			(LIGHT)			(A/G)		NOIT	S				ī	ı		11'5%"	14'	10'3"	
SER 106' GALLONS 25:  R 106' GALLONS 25:	*												0		<u> </u>				A		PERIMETE	APSP TYF	
SQ. FOOTAGE 8: GALLONS 25:  B  B  OVERDIG  OVERDIG  OVERVICTOR  OF SAND DE SAND DE SAND DE SAND BENCHMEN  STALLATION MANUAL FOR MORE	PERIMETES NOTE: REFER TO IN	CONCRETE BOND BEAM 6" TO 8" DEEP	UNDISTURBED EARTH		MATERIAL FOR —	USE NON-EXPANSIVE	<u></u>	<u> </u>	POLYMER		/	CONCRETE DECK	VERDIG DETAI			m	- TI 11 -	<b>3</b> -					
	ASTALLATION MANUAL FOR MOR					\		$\overline{\ \ }$			COPING								В				

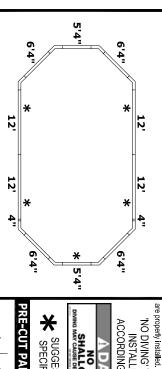


4


4

4

4

COZY COVE



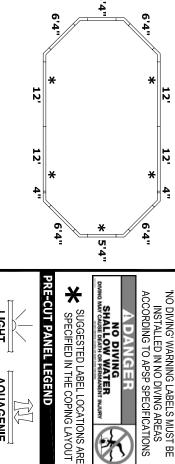





HGHT

AQUAGENIE 191

CORNERSTONE 20'9" X 39'9" GRECIAN CONTOUR BOTTOM

**JAN 2007** 

30250