
## 20' X 41' X 28' TRUE ELL LEFT 2'R


948

PERIMETER

DESCRIPTION

REV.

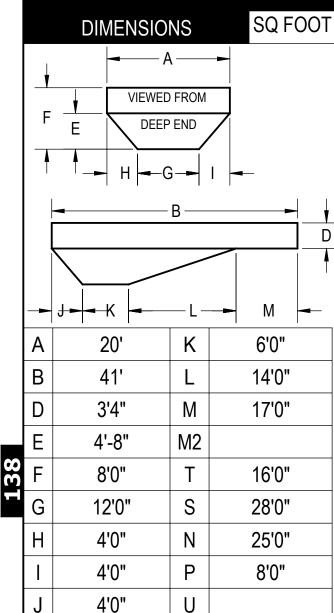

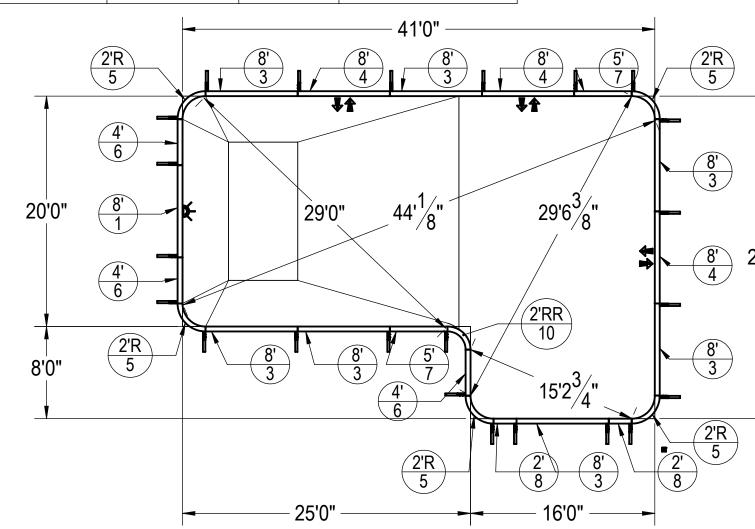

29162

## NOTES:

- THESE ARE FINISHED DIMENSIONS READY FOR THE LINER.
- 2. 3. DIMENSIONS ARE FROM INSIDE POOL PANELS.
- THE IDEAL WATER LEVER SHOULD BE TO THE MIDDLE OF THE SKIMMER OPENING(S)

**EXCAVATION NÓTES** 

- ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE. SOIL TO HAVE MINIMUM BEARING CAPACITY OF 2000 PSF.
- 5.
- LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND 6. FI EVATION.
- SEE "OVER DIG DETAIL" FOR EXCAVATION AROUND POOL. 7.
- FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL. 8.
- BACK FILL WITH NON-EXPANSIVE MATERIAL. 9

**IMPORTANT NOTES:** 

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.





132'10"

GALLONS

"NO DIVING" WARNING LABELS MUST ΒE

INSTALLED IN NO DIVING AREAS ACCORDING TO ANSI SPECIFICATIONS

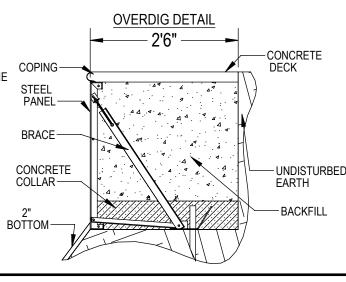

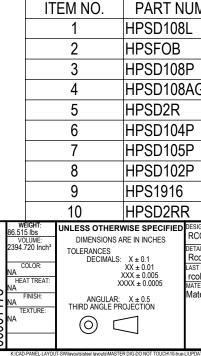

REVISI	ON HISTOR	Y			
		DATE	STATUS	ECO	BY
28'0"		DATE	STATUS	ECO	BY
MBER		DESCRI 8' LIGHT	PANEL		QTY. 1
	STEEL BRACE 23 8' PLAIN PANEL 7				
G	8' AG PANEL 3				
	2'R PANEL 5				
	4' PLAIN PANEL				3
	5' PLAIN PANEL				2
	2' PLAIN PANEL				2
	BOLT PACK 50 PCS				5
SIGNED BY:	GNED BY: CREATION DATE:				
COLBOCH 10/17/2012 TAILED BY: DETAILED DATE:					
colboch 8/30/2012 ST REVISED BY: LAST REVISED DATE:		BY HYDRA POOLS TTLE 20' X 41' X 28' TRUE ELL LEFT 2'R			
colboch TERIAL: aterial <not specified<="" td=""><td> 11/16/2012  &gt;</td><td>20</td><td>Λ ΤΙ Λ 20</td><td></td><td></td></not>	11/16/2012  >	20	Λ ΤΙ Λ 20		
		PART NUMBER:	60575	5	SCALE: 1:96 SHEET: 1 OF 1