## 26' X 43' TEE

ᄧ

\$

4 <u>ත</u>

PERIMETER 127'9"

**APSP TYPE** 

H

SQ. FOOTAGE


GALLONS

25664 868

6

ス

DIMENSIONS

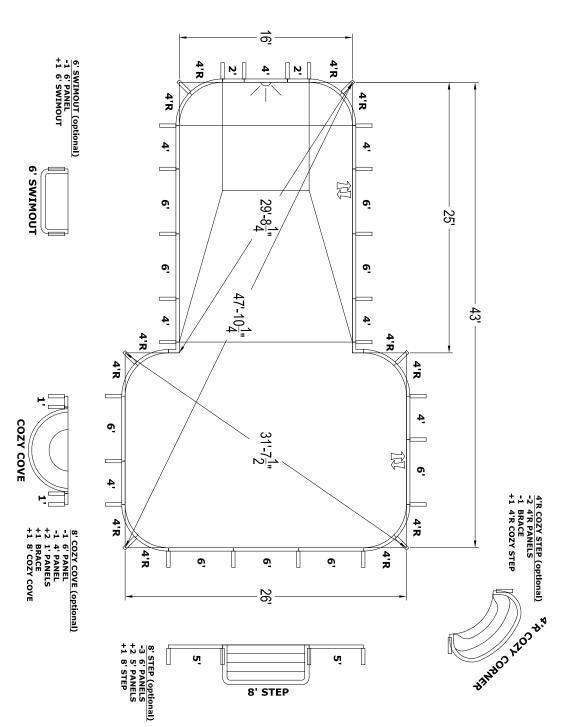

## ADDITIONAL NOTES

1. Rough excavation should be 2" deeper in each instance.
2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See "Overdig Detail" for excavation around pool.
5. Fill voids under base of panels and tamp well.
6. Backfill with non-expansive material. Rough excavation should be 2" deeper in each instance.

**EXCAVATION NOTES** 

Dimensions are from inside pool panels.
 The ideal water level should be to the middle of the skimmer opening(s).

hese are finished dimensions ready for the liner.

**GENERAL NOTES** 


THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.


agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an Proper installation is the responsibility of the dealer/builder/contractor.


**JAN 2007** 

CORNERSTONE

## ٩Ę٩ 29 2 COPING LAYOUT BILL OF MATERIALS 9 m U HP354 4'R PANEL | HP306A | 6' PANEL (A/G) HP322 | REVERSE 90° PANEL HP304 | 4' PANEL HP306L | 6' PANEL (LIGHT HP302 | 2' PANEL HP306 | 6' PANEL PART 48 3'4" 4 ထ္ $\infty$ DESCRIPTION U Z S 3 25 26 9 OVERDIG DETAIL \*NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO. CONCRETE BOND BEAM 6" TO 8" DEEP UNDISTURBED EARTH APPROX 4" DEEP POLYMER **NO DIVING WARNING** · 2'6" OVERDIG — COPING POLYMER VINYL LINER BENCHMARK

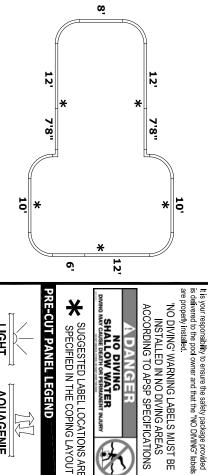

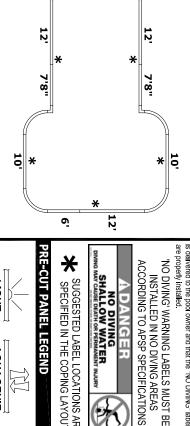



ATTENTION DEALER/BUILDER



HGHT

AQUAGENIE



26' X 43' TEE

30610

υσευπεντι ID: HF5300, Comerstone Standard Panel Layout Drawing Rev Date: 1216/2005 Rev Level: A

Copyright © 2007 by Hydra Pools