
32'2" X 28' HEART

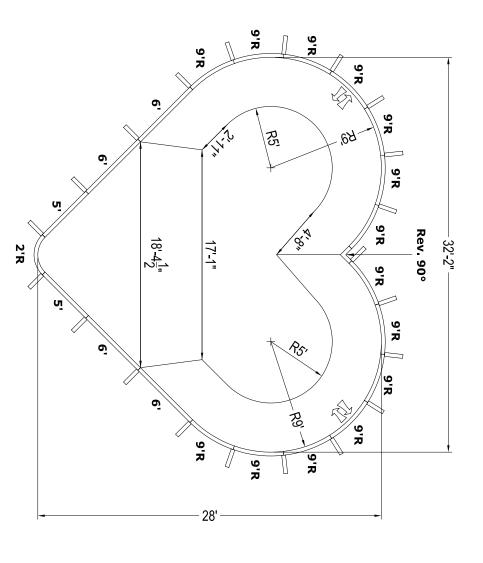

EXCAVATION NOTES

- hese are finished dimensions ready for the liner.

υσυπεντ ID: HF5300, Comerstone Standard Panel Layout Drawing Rev Date: 1216/2005 Rev Level: A

Dimensions are from inside pool panels.
 The ideal water level should be to the middle of the skimmer opening(s).

GENERAL NOTES

- 2. Soil to have minimum bearing capacity of 2000 P.S.F.
 3. Locate top of pool at least 6" above surrounding land elevation.
 4. See 'Overdig Detail' for exavation around pool.
 5. Fill voids under base of panels and tamp well.

Rough excavation should be 2" deeper in each instance.

2'R CORNER STEP

+1 2'R CORNER STEP


+2 2' PANELS -1 2'R PANEL -2 5' PANELS

2'R CORNER STEP (optional)

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. ADDITIONAL NOTES

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an Proper installation is the responsibility of the dealer/builder/contractor.

P T BILL OF MATERIALS $\boldsymbol{\varpi}$ DIMENSIONS m U |HP352M | 2'R PANEL HP359 9'R PANEL HP322 | REVERSE 90° PANEL HP359A | 9'R PANEL (A/G) HP306 | 6' PANEL HP399 | BRACE HP305 PART DESCRIPTION 24'2" 32'2" 3'4" 4 ΩĪ 18 28 5' PANEL Z 3 8'4<u>"</u> 10'8" ΩĪ PERIMETER **APSP TYPE** OVERDIG DETAIL USE NON-EXPANSIVE MATERIAL FOR BACKFILL * NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO. CONCRETE BOND BEAM 6" TO 8" DEEP UNDISTURBED APPROX 4" DEEP 95'8" BRACE 0 --- 2'6" OVERDIG -SQ. FOOTAGE CAPACITY 17128 ALUMINUM OR SAND BOTTOM POLYMER BENCHMARK 901

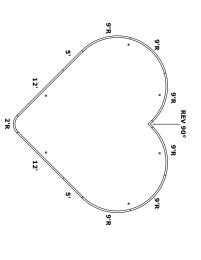

are properly installed It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels 'NO DIVING' WARNING LABELS MUST BE INSTALLED IN NO DIVING AREAS

NO DIVING WARNING

ATTENTION DEALER/BUILDER:

COPING LAYOUT



NO DIVING
SHALLOW WATER
MAY CAUSE DEATH OR PERMANENT INJURY

SUGGESTED LABEL LOCATIONS ARE SPECIFIED IN THE COPING LAYOUT















30990