

## NOTES:

THESE ARE FINISHED DIMENSIONS READY FOR THE LINER.

Р

- DIMENSIONS ARE FROM INSIDE POOL PANELS.
- THE IDEAL WATER LEVER SHOULD BE TO THE MIDDLE OF THE SKIMMER OPENING(S)


## **EXCAVATION NOTES**

4'0"

- ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE. SOIL TO HAVE MINIMUM BEARING CAPACITY OF 2000 PSF.
- LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND
- SEE "OVER DIG DETAIL" FOR EXCAVATION AROUND POOL.
- FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL.
- BACK FILL WITH NON-EXPANSIVE MATERIAL.

## **IMPORTANT NOTES:**

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.

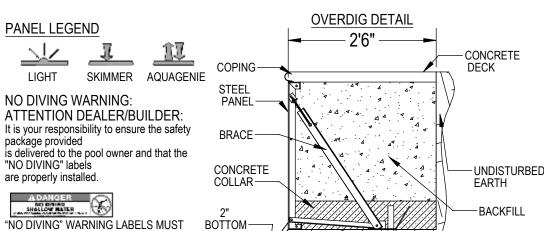

INSTALLED IN NO DIVING AREAS

ACCORDING TO ANSI SPECIFICATIONS

8'

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	HPSD108P	8' PLAIN PANEL	8
2	HPSFOB	STEEL BRACE	18
3	HPSD2R	2'R PANEL	4
4	HPSD108AG	8' AG PANEL	1
5	HPSD108L	8' LIGHT PANEL	1
6	HPSD103P	3' PLAIN PANEL	4
	HPS1916	BOLT PACK 50 PCS	4
FIGHT: LINI ESS OTHERWISE SPECIFIED DESIGNED BY: CREATION DATE:			

10/17/2012

8/30/2012

11/14/2012

6.515 lbs	ONLEGO OTTILINATION OF CONTILID	RCOLBOCH	
VOLUME:	DIMENSIONS ARE IN INCHES	RCOLBOCH	
394.720 Inch <sup>3</sup>	TOLERANCES	DETAILED BY:	
	DECIMALS: X ± 0.1	RCOLBOCH	
COLOR:		LAST REVISED BY:	
	XXX ± 0.005	rcolboch	
HEAT TREAT: A	XXXX ± 0.0005	MATERIAL:	
FINISH:	ANGULAR: X ± 0.5 THIRD ANGLE PROJECTION	Material <not specifie<="" td=""></not>	
TEXTURE:	THIRD ANGLE PROJECTION		

SAMSON STEEL BY HYDRA POOLS

ECO

BY

STATUS

PRODUCTION NONE

DATE

11/5/2012

18' X 36' RECTANGLE 2' R

 $\odot$ 60144