

THE IDEAL WATER LEVER SHOULD BE TO THE MIDDLE OF THE SKIMMER OPENING(S)

EXCAVATION NOTES


- ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE.
 SOIL TO HAVE MINIMUM BEARING CAPACITY OF 2000 PSF.
 LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND
- SEE "OVER DIG DETAIL" FOR EXCAVATION AROUND POOL.
- FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL.
- BACK FILL WITH NON-EXPANSIVE MATERIAL.

IMPORTANT NOTES:
THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.



NO DIVING WARNING:

LIGHT










are properly installed.

"NO DIVING" WARNING LABELS MUST INSTALLED IN NO DIVING AREAS

ACCORDING TO ANSI SPECIFICATIONS

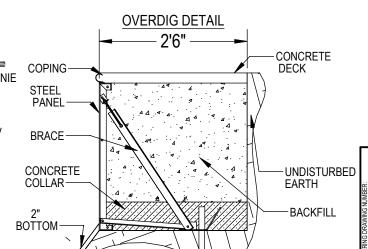

	ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
	1	HPSD108P	8' PLAIN PANEL	8
	2	HPSFOB	STEEL BRACE	17
	3	HPSD108L	8' LIGHT PANEL	1
	4	HPSD108AG	8' AG PANEL	2
	5	HPSD106P	6' PLAIN PANEL	4
Ī	6	HPSD104P	4' PLAIN PANEL	2
	7	HPS6CA	6" CORNER ASSEMBLY	4
	8	HPS1916	BOLT PACK 50 PCS	5
IA/E	ICUT:	DEGLOVED BY	CREATION DATE:	

WEIGHT: 86.515 lbs	UNLESS OTHERWISE SPECIFIED	DESIGNED BY:	CREATION DATE:
VOLUME:	DIMENSIONS ARE IN INCHES	RCOLBOCH	10/17/2012
2394.720 Inch ³	TOLERANCES DECIMALS: X ± 0.1	DETAILED BY: RCOLBOCH	DETAILED DATE: 8/30/2012
COLOR: NA HEAT TREAT:	XXX ± 0.005	LAST REVISED BY: rcolboch	LAST REVISED DAT 11/14/2012
NA FINISH:		MATERIAL: Material <not specified=""></not>	
NA	THIRD ANGLE PROJECTION		

SAMSON STEEL BY HYDRA POOLS

20' X 40' RECTANGLE 6" R

60161

 \odot