

OPENING(S)

EXCAVATION NOTES:

- ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE.
 SOIL TO HAVE MINIMUM BEARING CAPACITY OF 2000 PSF.
 LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND
- SEE "OVER DIG DETAIL" FOR EXCAVATION AROUND POOL.
- FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL.
- BACK FILL WITH NON-EXPANSIVE MATERIAL.

IMPORTANT NOTES:

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.




NO DIVING WARNING: ATTENTION DEALER/BUILDER: It is your responsibility to ensure the safety

package provided is delivered to the pool owner and that the "NO DIVING" labels are properly installed.



INSTALLED IN NO DIVING AREAS ACCORDING TO ANSI SPECIFICATIONS

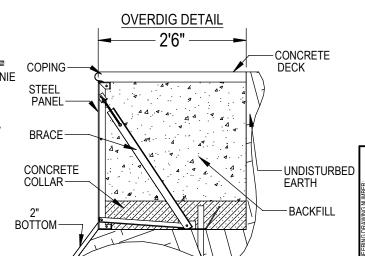

ĺ	ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
	2	HPSD9R8L	9'R 8' LIGHT PANEL	1
-	3	HPSFOB	STEEL BRACE	16
	4	HPSD9R8	9'R 8' PLAIN PANEL	5
	5	HPSD9R2	9'R 2' PLAIN PANEL	4
	6	HPSD108P	8' PLAIN PANEL	3
	7	HPSD108AG	8' AG PANEL	1
Ī	8	HPSD102P	2' PLAIN PANEL	2
	9	HPS1916	BOLT PACK 50 PCS	4

ECO

BY

STATUS

			8 HPSD102P			2' PLAIN PANEL		2		
				9 HPS1916			BOLT PACK 50 PCS		4	
		WEI0 86.515 VOLU 2394.72	lbs JME:	DIMENSIONS ARE IN INCHES		DESIGNED BY: RCOLBOCH DETAILED BY:	CREATION DATE: 10/17/2012 DETAILED DATE:	SAMSON STEEL BY HYDRA POOLS TITLE: 18' X 35'9" OVAL BOWTIE		
	MBEK:	COI NA	LOR:	DECIMALS: X ± 0.1 XX ± 0.01		Rcolboch LAST REVISED BY:	8/30/2012 LAST REVISED DATE:			
	851		TREAT:		XXX ± 0.005 XXXX ± 0.0005 ANGULAR: X ± 0.5 ANGLE PROJECTION	rcolboch 11/14/2012 MATERIAL: Material < not specified>				
List	00000851	NA IEA	TORE.	0				60327	ALE: SIZE: 1:96 B EET: 1 OF 1	