16' X 32' MARTINIQUE LEFT 2'R



6

7

8

9

10

11

12

COLOR:

HEAT TREAT

FINISH

TEXTURE:

HPSD10R503

HPSD10R6

HPSD104P

HPSD102P

HPSD103P

HPSD2R

HPS1916

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

DECIMALS: X ± 0.1 XX ± 0.01 XXX ± 0.005

 \subseteq

ANGULAR: X ± 0.5 THIRD ANGLE PROJECTION

XXXX ± 0.0005

TOI FRANCES

 \bigcirc

REVISION HISTORY





SQ FOOT 584

PERIMETER


90'11"


GALLONS

19865

REV.

Δ VIEWED FROM F DEEP END Е

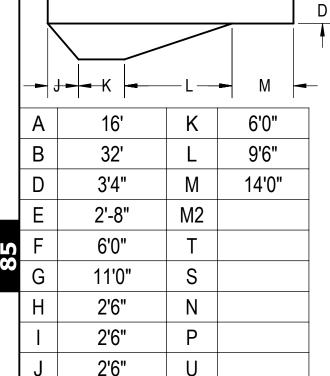

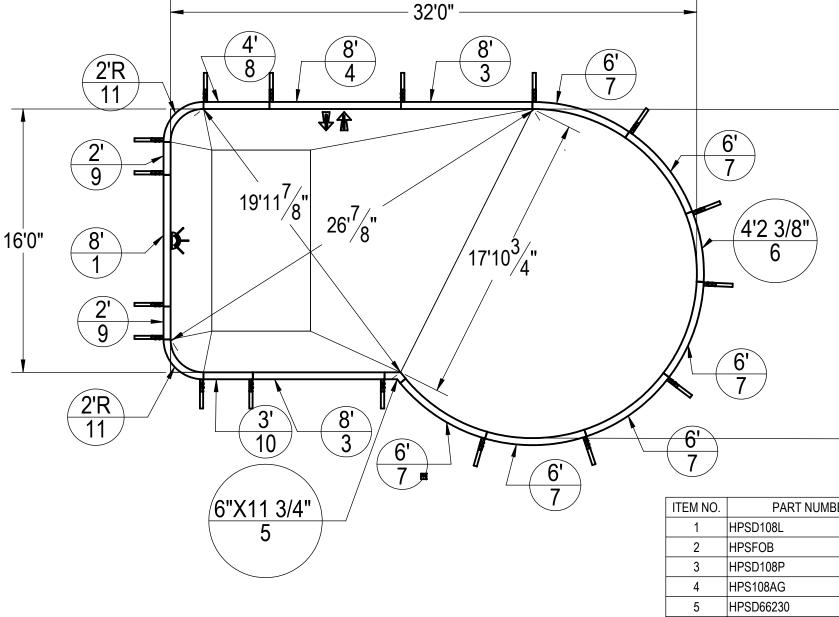

NOTES:

- THESE ARE FINISHED DIMENSIONS READY FOR THE LINER.
- 2. 3. DIMENSIONS ARE FROM INSIDE POOL PANELS.
- THE IDEAL WATER LEVER SHOULD BE TO THE MIDDLE OF THE SKIMMER OPENING(S)

EXCAVATION NÓTES

- ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE. SOIL TO HAVE MINIMUM BEARING CAPACITY OF 2000 PSF. 5.
- LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND 6. FI EVATION.
- SEE "OVER DIG DETAIL" FOR EXCAVATION AROUND POOL. 7.
- FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL. 8.
- BACK FILL WITH NON-EXPANSIVE MATERIAL. 9


IMPORTANT NOTES:

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.



"NO DIVING" WARNING LABELS MUST BE


INSTALLED IN NO DIVING AREAS ACCORDING TO ANSI SPECIFICATIONS

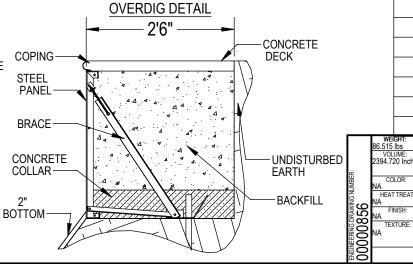


		DATE	STATUS	ECO	BY
20'0"					
BER	DESCRIPTION				QTY.
		8' LIGHT PANEL			1
	STEEL BRACE				17
	8' PLAIN PANEL				2
	8' AG PANEL				1
	6"X 11 3/4" 230° ELL				1
	10'R 4' 2 3/8" PLAIN PANEL				1
	10'R 6' PLAIN PANEL				6
	4' PLAIN PANEL				1
		2' PLAIN PANEL		2	
		3' PLAIN PANEL		1	
		2'R PANEL		2	
SIGNED BY: CREATION DATE:		BOLT PACK 50 PCS		4	
COLBOCH 10/17/2012				N STEEL	
TAILED BY: DETAILED DATE: Colboch 8/30/2012 ST REVISED BY: LAST REVISED DATE			BY HYDR		
	14/2012	16	5' X 32' MART	INIQUE L	LEFT 2'R
aterial <not specified=""></not>					
		PART NUMBER:	60386		SCALE: 1:96 SHEET: 1 OF 1

16' X 32' MARTINIQUE LEFT 2'R



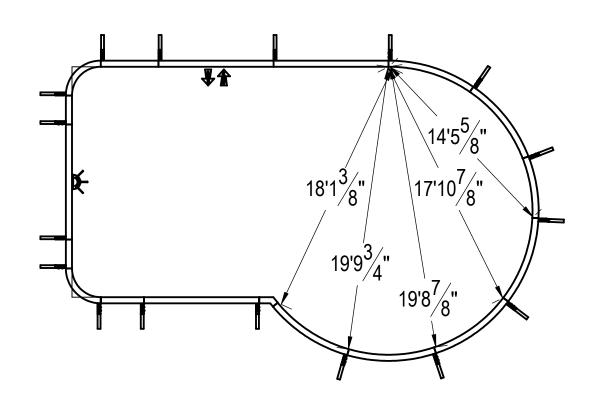

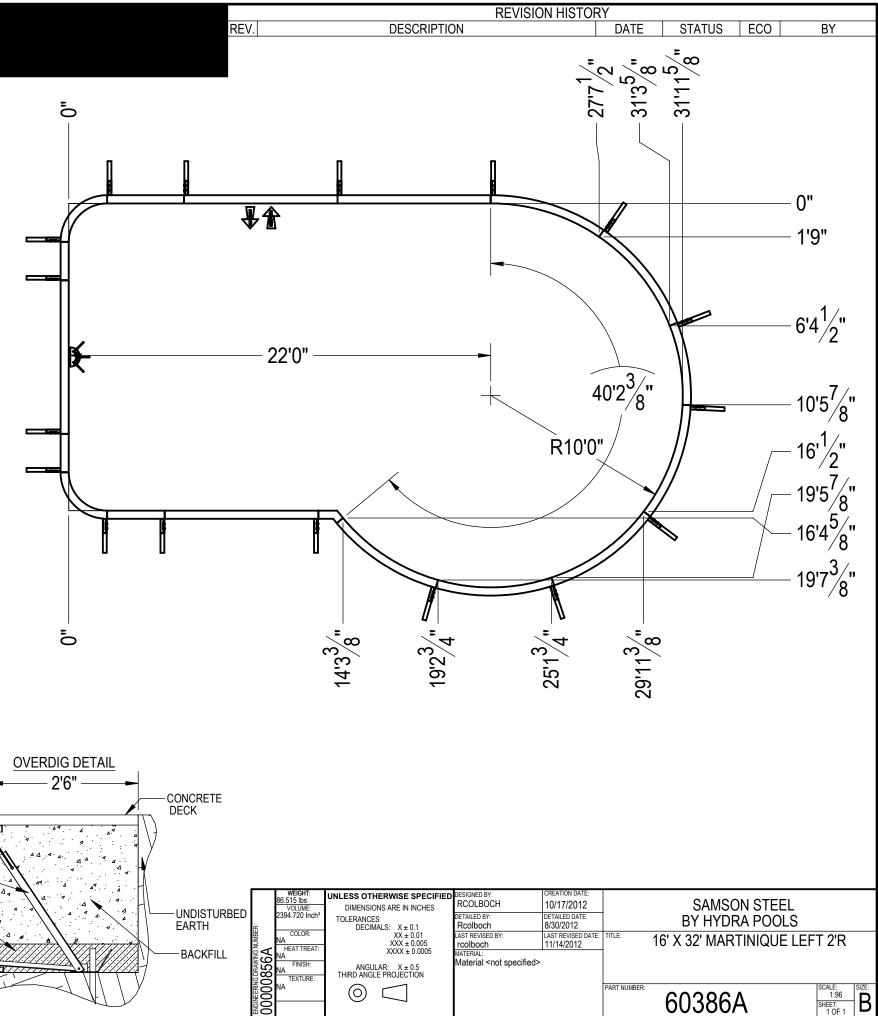

NOTES:


85A

- THESE ARE FINISHED DIMENSIONS READY FOR THE LINER.
- DIMENSIONS ARE FROM INSIDE POOL PANELS. 2. 3.
- THE IDEAL WATER LEVER SHOULD BE TO THE MIDDLE OF THE SKIMMER OPENING(S)

EXCAVATION NOTES

- 5.
- ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE. SOIL TO HAVE MINIMUM BEARING CAPACITY OF 2000 PSF. LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND 6. ELEVATION.
- SEE "OVER DIG DETAIL" FOR EXCAVATION AROUND POOL.
- FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL. 8.
- BACK FILL WITH NON-EXPANSIVE MATERIAL. 9

IMPORTANT NOTES: THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.



INSTALLED IN NO DIVING AREAS ACCORDING TO ANSI SPECIFICATIONS

