
20' X 40' LAZY ELL RIGHT 2'R



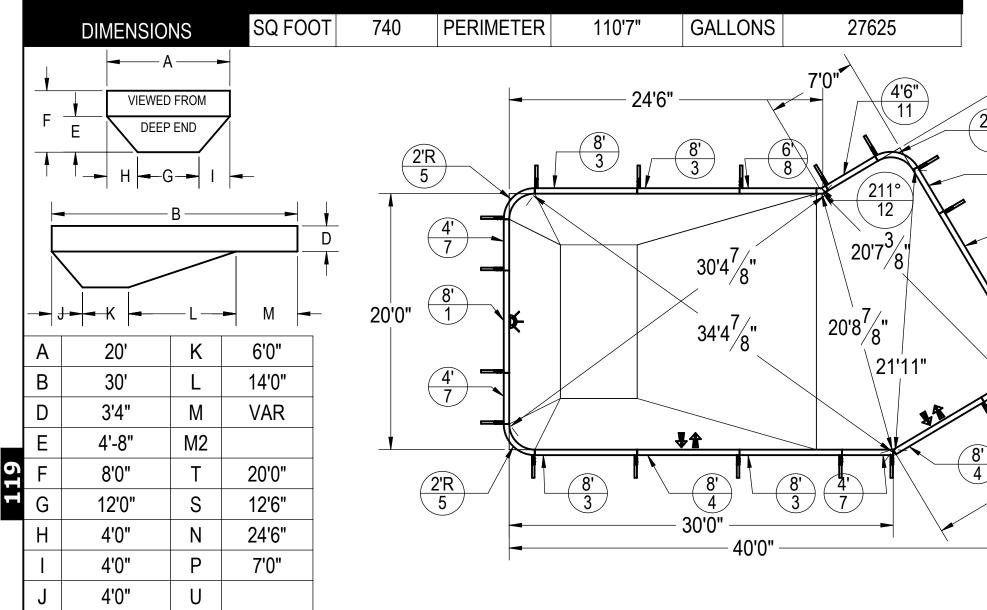


- THESE ARE FINISHED DIMENSIONS READY FOR THE LINER.
- DIMENSIONS ARE FROM INSIDE POOL PANELS.
- 2. 3. THE IDEAL WATER LEVER SHOULD BE TO THE MIDDLE OF THE SKIMMER OPENING(S)

EXCAVATION NÓTES

- ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE. SOIL TO HAVE MINIMUM BEARING CAPACITY OF 2000 PSF. 5.
- LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND 6. FI EVATION.
- SEE "OVER DIG DETAIL" FOR EXCAVATION AROUND POOL. 7.
- FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL. 8.
- BACK FILL WITH NON-EXPANSIVE MATERIAL. 9


IMPORTANT NOTES:


THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.



"NO DIVING" WARNING LABELS MUST ΒE

INSTALLED IN NO DIVING AREAS ACCORDING TO ANSI SPECIFICATIONS



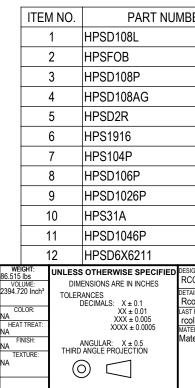

REV.

2'R

5

4'

7

8'

3

2'6'

9

12'6"

[4]

7

20'0"

2'R

5

DESCRIPTION

DAT	(ED)	60480	

BER		DESCRIPTION	QTY.
		8' LIGHT PANEL	1
		STEEL BRACE	20
		8' PLAIN PANEL	5
		8' AG PANEL	2
		4	
		5	
		4' PLAIN PANEL	5
		6' PLAIN PANEL	1
		2'6" PLAIN PANEL	1
		31° ANGLE	1
		4'6' PLAIN PANEL	1
		6"X6" 211° ELL PANEL	1
SIGNED BY: COLBOCH TAILED BY: colboch	CREATION DATE: 10/17/2012 DETAILED DATE: 8/30/2012	SAMSON STEEL BY HYDRA POOLS	
trevised by: colboch TERIAL: aterial <not specif<="" td=""><td>LAST REVISED DATE: 11/16/2012</td><td>10° X 40' LAZY ELL RIG</td><td></td></not>	LAST REVISED DATE: 11/16/2012	10° X 40' LAZY ELL RIG	
		PART NUMBER: 60480	SCALE: 1:96 SHEET: 1.0F 1

REVISION HISTO	DRY			
	DATE	STATUS	ECO	BY