

## 16' X 32'4" ROMAN END DEEP 6"R

DESCRIPTION

REV.

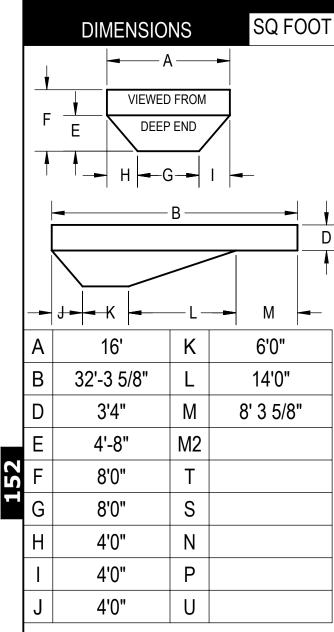

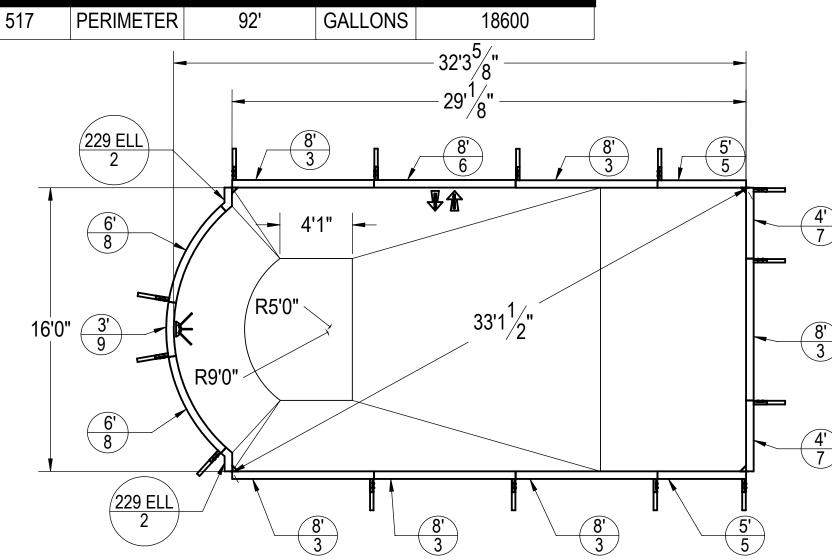

## NOTES:

- THESE ARE FINISHED DIMENSIONS READY FOR THE LINER.
- 2. 3. DIMENSIONS ARE FROM INSIDE POOL PANELS.
- THE IDEAL WATER LEVER SHOULD BE TO THE MIDDLE OF THE SKIMMER OPENING(S)

**EXCAVATION NÓTES** 


- ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE. SOIL TO HAVE MINIMUM BEARING CAPACITY OF 2000 PSF. 5.
- LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND 6. FI EVATION.
- SEE "OVER DIG DETAIL" FOR EXCAVATION AROUND POOL. 7.
- FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL. 8.
- BACK FILL WITH NON-EXPANSIVE MATERIAL. 9


**IMPORTANT NOTES:** 

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.





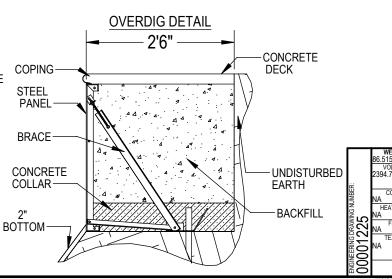

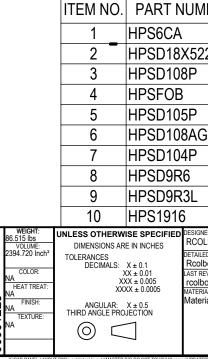

RE	VISION HISTOR		
N		DATE STATUS E	ECO BY
$\rightarrow$			
/			
_)			
$\rightarrow$			
/			
		DESCRIPTION	ΟΤΥ
JMBER	DESCRIPTION		QTY.
500	6" CORNER ASSEMBLY 4   12.5 X5.5 X229 ELL PANEL 2		
522 P	8' PLAIN PANEL 6		
1	STEEL BRACE 14		
P	5' PLAIN PANEL 2		
AG	8' AG PANEL 1		
P	4' PLAIN PANEL		
6	9'R 6' PLAIN PANEL		2
BL	9'R 3' LIGHT PANEL		1
		OLT PACK 50 PCS	5
ESIGNED BY: RCOLBOCH	CREATION DATE: 10/17/2012	SAMSON	STEEL
ETAILED BY: Rcolboch	DETAILED DATE: 8/30/2012	BY HYDRA	POOLS
AST REVISED BY: COIboch ATERIAL:	LAST REVISED DATE: 11/16/2012	16' X 32'4" ROMAN	N END DEEP 6"R
Alexac: Material <not specified=""></not>			
			SCALE: SIZE: 1:96
		60800	SHEET: 1 OF 1
PDATED/60800			