22'4" X 40'2" MIRAGE A-B 46'134" A-C 54'2" B-C 28'414" **Β**-ω A-7 34'9"

DIMENSIONS

7

40'13/,"

4

PERIMETER 103'3"

APSP TYPE

H

SQ. FOOTAGE

GALLONS

21528 898

48 3'4<u>"</u>


3


16'1%'

 ∞

20'7"



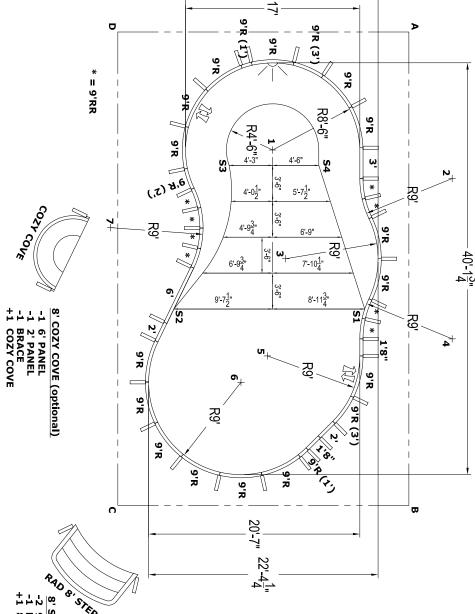

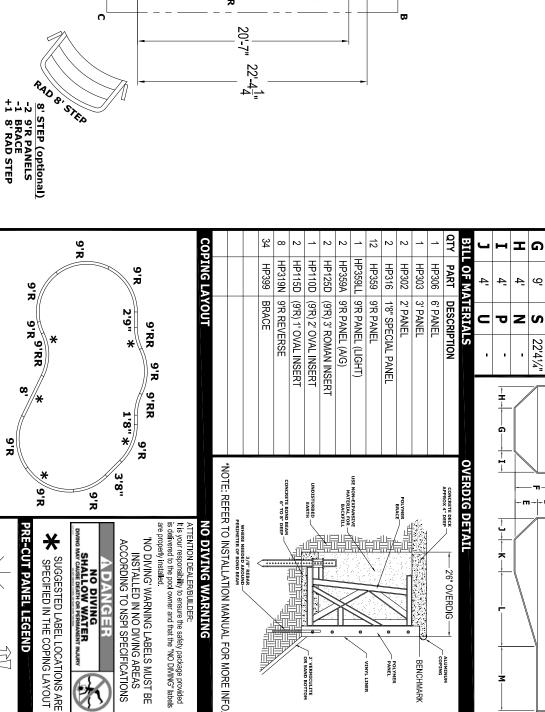

POLYMER

BENCHMARK

VINYL LINER

GENERAL NOTES

- hese are finished dimensions ready for the liner.

υναμπεντι IJ: HF5300, Comerstone Standard Panel Layout Drawing Rev Date: 12/6/2005 Rev Level: A

- Dimensions are from inside pool panels.
 The ideal water level should be to the middle of the skimmer opening(s).
- Rough excavation should be 2" deeper in each instance.

EXCAVATION NOTES

2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See 'Overdig Detail' for excavation around pool.
5. Fill voids under base of panels and tamp well.

ADDITIONAL NOTES

agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of The dealer or contractor who sells or installs your pool is an independant contractor and is not an THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY.

Proper installation is the responsibility of the dealer/builder/contractor.

JAN 2007

CORNERSTONE 22'4" X 40'2" MIRAGE

E

AQUAGENIE

30915